



Vendo
SANDEN



**Vending
Machines**

PAGE / 02

Snacks, Drinks & Merchandising 04
 Frozen Food 20
 Cold Drinks 24
 Hot Drinks & Coffee 38



**Shop
Solutions**

PAGE / 44



**Outdoor
Line**

PAGE / 58



**Connectable
Machines**

PAGE / 70




**Table
Tops**

PAGE / 80

Hot Drinks & Coffee 82
 Snacks, Drinks & Merchandising 88
 All-in-One Compact Solutions 96

Vending Machines

**ECO-VENDING SOLUTIONS FOR SNACKS,
DRINKS, FROZEN FOOD AND MERCHANDISING.**

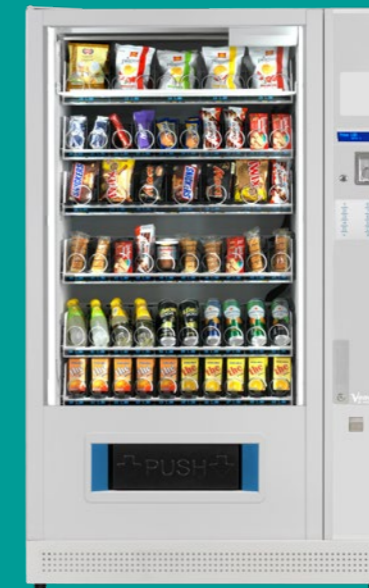

**An eco-friendly choice for
your business and for the planet.**

Our vending machines deliver top-tier performance while prioritizing sustainability. Powered by R290 gas, a natural and eco-friendly refrigeration system, every model in our Drink, Snack, and Frozen range supports our Carbon Neutral Project, driving us toward our NET ZERO goal by 2050.


Snacks, Drinks & Merchandising

Our G-Snack vending machines are designed to keep up with evolving consumer needs. That's why we offer solutions for every budget and requirement!

Fully customizable with branded graphics, three delivery systems, touch or keypad selection panels, multiple payment options, and age-control features, each G-Snack model accommodates a wide range of classic snacks and Extra Vending items, including fresh meat and vegetables, hi-tech devices, first-aid kits, gym essentials, beauty products, and more.



SNACKS, DRINKS & MERCHANDISING PRODUCT RANGE

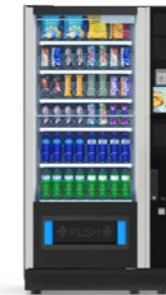

 G-Snack Design Touch



 G-Snack Design



 G-Snack Standard



 G-Snack Budget



 G-Snack Budget Combi






 G-Snack Evolution



 Back Loader

Versatile Delivery Systems

Our Belt, Rotary, and Spiral delivery systems are fully interchangeable, providing versatile dispensing solutions for a wide range of food and merchandise. Their adaptive design ensures a perfect fit for products of any size, maximizing efficiency and convenience.

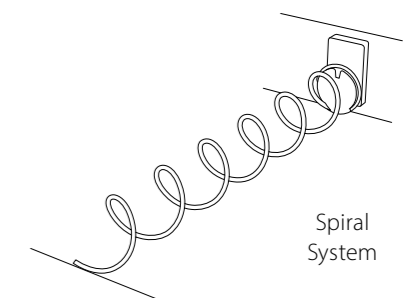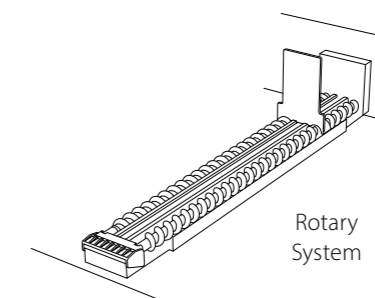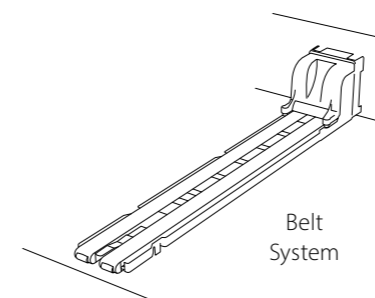



G-Snack Touch
10 selection
STX



	G-SNACK TOUCH TEN (X) MASTER STX	G-SNACK TOUCH EIGHT (VIII) MASTER ST8	G-SNACK TOUCH SIX (VI) MASTER ST6
DIMENSIONS H x W x D	1830* x 1125 x 845 mm	1830* x 980 x 845 mm	1830* x 830 x 845 mm
WEIGHT (NET - Standard machine without options)	340 kg	310 kg	275 kg
NO. OF SELECTIONS PER SHELF	10	8	6
NO. OF SHELVES	Standard 6 / Max. 7	Standard 6 / Max. 7	Standard 6 / Max. 7
NO. OF SELECTIONS	Max. 70	Max. 56	Max. 42
DISPLAY	7" Touch screen	7" Touch screen	7" Touch screen
PROTOCOL	Executive / MDB	Executive / MDB	Executive / MDB
COOLING SYSTEM CONTROL	Electronic	Electronic	Electronic
COOLING UNIT	HCD	HCD	HCD
INTERNAL TEMPERATURE RANGE	+2 °C up to +18 °C	+2 °C up to +18 °C	+2 °C up to +18 °C
MAX. POWER CONSUMPTION	350 W	350 W	350 W
POWER SUPPLY	230/240 V - 50/60 Hz	230/240 V - 50/60 Hz	230/240 V - 50 Hz
CLIMATE CLASS	ST (+18 °C up to +38 °C)	ST (+18 °C up to +38 °C)	ST (+18 °C up to +38 °C)
ENERGY CLASS	Cat. 2 Cat. 3 Cat. 4	Cat. 2 Cat. 3 Cat. 4	Cat. 2 Cat. 3 Cat. 4
ENERGY CONSUMPTION (kWh/annum)	694 Cat. 2	869 Cat. 3	925 Cat. 4
	681 Cat. 2	849 Cat. 3	878 Cat. 4
	629 Cat. 2	798 Cat. 3	793 Cat. 4

*With adjustable feet

G-SNACK DESIGN TOUCH

Essentials at your fingertips

Versatile and smart, G-Snack Touch is the automatic vending machine designed to increase your profits in the most effortless and intuitive way possible by combining top-notch technology with SandenVendo's flagship cooling units.

G-Snack Touch, equipped with a user-friendly and commercially advantageous touch display with a multi-selection feature to persuade clients into buying more products, can accommodate a large variety of cold drinks, snacks and foods including fresh goods such as lunch boxes or salads on the go; its extreme flexibility allows G-Snack Touch to be suitable for installation inside automated shops as an Extra-Vending machine that dispenses merchandising items.


Connect up to **4**
Slave Machines



Low Energy
Impact



User-Friendly

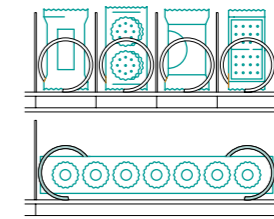

DUO SYNCHRO SPIRAL
A cutting-edge system with a dual motor drive, ensuring perfectly synchronized rotation for precise dispensing. Ideal for wide and bulky products.




Maximum
Flexibility



24/7
Reliable



Modular
System

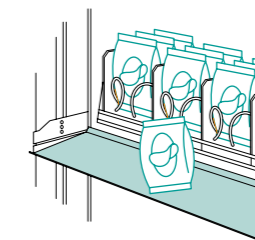

SPEEDY LIFT
Delicate and fragile products can be securely dispensed at eye level for maximum convenience. Plus, our system ensures fast and efficient delivery every time!

STANDARD COLOUR **BLACK** ●



G-Snack Design
10 selection
SDX



	G-SNACK DESIGN TEN (X) MASTER SDX	G-SNACK DESIGN EIGHT (VIII) MASTER SC8	G-SNACK DESIGN SIX (VI) MASTER SC6
DIMENSIONS H x W x D	1830* x 1125 x 845 mm	1830* x 980 x 845 mm	1830* x 830 x 845 mm
WEIGHT (NET - Standard machine without options)	340 kg	310 kg	275 kg
NO. OF SELECTIONS PER SHELF	10	8	6
NO. OF SHELVES	Standard 6 / Max. 7	Standard 6 / Max. 7	Standard 6 / Max. 7
NO. OF SELECTIONS	Max. 70	Max. 56	Max. 42
PROTOCOL	Executive / MDB	Executive / MDB	Executive / MDB
COOLING SYSTEM CONTROL	Electronic	Electronic	Electronic
COOLING UNIT	HCD	HCD	HCD
INTERNAL TEMPERATURE RANGE	+2 °C up to +18 °C	+2 °C up to +18 °C	+2 °C up to +18 °C
MAX. POWER CONSUMPTION	350 W	350 W	350 W
POWER SUPPLY	230/240 V - 50/60 Hz	230/240 V - 50/60 Hz	230/240 V - 50 Hz
CLIMATE CLASS	ST (+18 °C up to +38 °C)	ST (+18 °C up to +38 °C)	ST (+18 °C up to +38 °C)
ENERGY CLASS	Cat. 2 Cat. 3 Cat. 4	Cat. 2 Cat. 3 Cat. 4	Cat. 2 Cat. 3 Cat. 4
ENERGY CONSUMPTION (kWh/annum)	694 Cat. 2	869 Cat. 3	925 Cat. 4
	681 Cat. 2	849 Cat. 3	878 Cat. 4
	629 Cat. 2	798 Cat. 3	793 Cat. 4

*With adjustable feet

G-SNACK DESIGN

Snacking? Solved.

Beyond simple product selection, G-Snack Design is such a versatile automatic vending machine that opens up vast opportunities to customers who are interested in engaging with a solid wealth of retail possibilities.

Moreover, G-Snack Design 6 and 8 are designed to pass through narrow passages thanks to their split function which separates the main body from the payment column.

The extreme versatility of this vending machine allows for accommodating a large array of F&B products as well as Extra-Vending merchandise of various sizes and shapes.

As the most elegant range of vending machines, G-Snack Design seamlessly complements upscale environments such as high-end offices, offering both functionality and refined style.

Connect **1**
Slave Machine



Low Energy
Impact




Maximum
Flexibility




Reliable



Modular
System

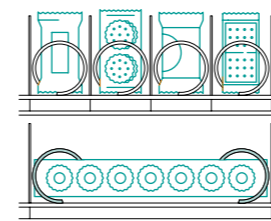

DUO SYNCHRO SPIRAL
A cutting-edge system with a dual motor drive, ensuring perfectly synchronized rotation for precise dispensing. Ideal for wide and bulky products.

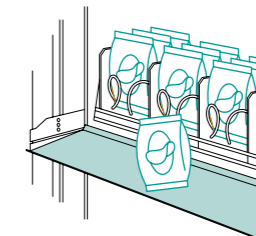

SPEEDY LIFT
Delicate and fragile products can be securely dispensed at eye level for maximum convenience. Plus, our system ensures fast and efficient delivery every time!

STANDARD COLOUR **BLACK** ●



G-Snack SM8



	G-SNACK STANDARD TWELVE (XII) MASTER S2L	G-SNACK STANDARD TEN (X) MASTER SMX	G-SNACK STANDARD EIGHT (VIII) MASTER SM8	G-SNACK STANDARD SIX (VI) MASTER SM6								
DIMENSIONS H x W x D	1830* x 1290 x 900 mm	1830* x 1125 x 845 mm	1830* x 980 x 845 mm	1830* x 830 x 845 mm								
WEIGHT (NET - Standard machine without options)	410 kg	340 kg	310 kg	275 kg								
NO. OF SELECTIONS PER SHELF	12 (6+6)	10	8	6								
NO. OF SHELVES	Standard 6 / Max. 7	Standard 6 / Max. 7	Standard 6 / Max. 7	Standard 6 / Max. 7								
NO. OF SELECTIONS	Max. 84	Max. 70	Max. 56	Max. 42								
PROTOCOL	Executive / MDB	Executive / MDB	Executive / MDB	Executive / MDB								
COOLING SYSTEM CONTROL	Electronic	Electronic	Electronic	Electronic								
COOLING UNIT	HCD	HCD	HCD	HCD								
INTERNAL TEMPERATURE RANGE	+2 °C up to +18 °C	+2 °C up to +18 °C	+2 °C up to +18 °C	+2 °C up to +18 °C								
MAX. POWER CONSUMPTION	350 W	350 W	350 W	350 W								
POWER SUPPLY	230/240 V - 50/60 Hz	230/240 V - 50/60 Hz	230/240 V - 50/60 Hz	230/240 V - 50 Hz								
CLIMATE CLASS	ST (+18 °C up to +38 °C)	ST (+18 °C up to +38 °C)	ST (+18 °C up to +38 °C)	ST (+18 °C up to +38 °C)								
ENERGY CLASS	Cat. 2 Cat. 3 Cat. 4	Cat. 2 Cat. 3 Cat. 4	Cat. 2 Cat. 3 Cat. 4	Cat. 2 Cat. 3 Cat. 4								
ENERGY CONSUMPTION (kWh/annum)	837 Cat. 2	992 Cat. 3	1063 Cat. 4	694 Cat. 2	869 Cat. 3	925 Cat. 4	681 Cat. 2	849 Cat. 3	878 Cat. 4	629 Cat. 2	798 Cat. 3	793 Cat. 4

*With adjustable feet.

G-SNACK STANDARD

Proper snacking attitude

Backed by SandenVendo's expertise in thermo-dynamics and cooling technologies, G-Snack Standard features all the advanced software and technology from the Design line, delivering top performance at an affordable price.

Spacious and versatile as every G-Snack model, the new G-Snack Standard XII model can accommodate up to 84 selections, including a vast assortment of bulk-size and Extra-Vending merchandise thanks to an extremely flexible tray configuration system.

Connect **1**
Slave Machine



Low Energy
Impact




Maximum
Flexibility




Reliable



Modular
System

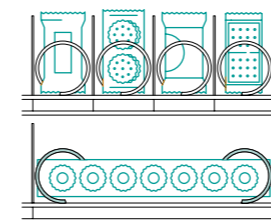

DUO SYNCHRO SPIRAL
A cutting-edge system with a dual motor drive, ensuring perfectly synchronized rotation for precise dispensing. Ideal for wide and bulky products.

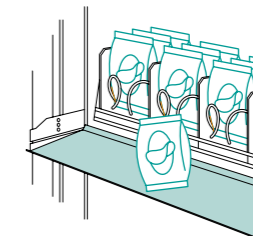

SPEEDY LIFT
Delicate and fragile products can be securely dispensed at eye level for maximum convenience. Plus, our system ensures fast and efficient delivery every time!

STANDARD COLOUR **BLACK** ●



G-Snack Budget Master 8

G-SNACK BUDGET

Quality beyond budget

The key to success lies in simplicity, and G-Snack Budget is the automatic vending machine that knows best.

This unique, practical, versatile, and durable machine embodies SandenVendo's thermodynamics and cooling systems expertise, but at a lower price.

G-Snack Budget is equipped with top-notch features, fitted with a pre-cooling area to store products at optimal, ready-to-sell temperatures, a large LCD, LED lighting, and an advanced energy-saving program. It is the first vending machine in its class to achieve Ecolabel B!

G-SNACK BUDGET MASTER B58	
DIMENSIONS H x W x D	1830 x 885 x 780 mm
WEIGHT (NET - Standard machine without options)	250 kg
NO. OF SELECTIONS PER SHELF	8
NO. OF SHELVES	Standard 6 / Max. 7
NO. OF SELECTIONS	Max. 56
PROTOCOL	Executive / MDB
COOLING SYSTEM CONTROL	Electronic
COOLING UNIT	HCD
INTERNAL TEMPERATURE RANGE	+8 °C up to +16 °C
MAX. POWER CONSUMPTION	250 W
POWER SUPPLY	230/240 V - 50 Hz
CLIMATE CLASS	ST (+18 °C up to +38 °C)
ENERGY CLASS	B
ENERGY CONSUMPTION (kWh/annum)	444



Eco-Friendly Solution




Affordable



Reliable



Storage Area

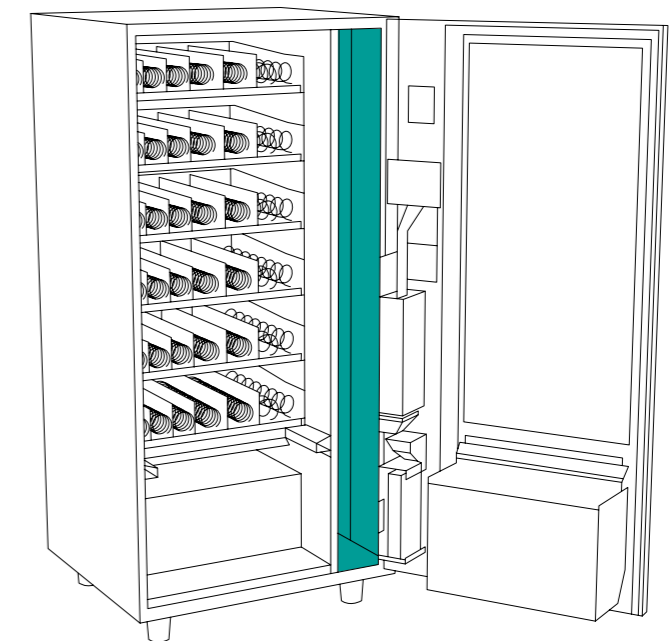

PRODUCT STORAGE AREA

Products can be stored in a pre-cooled area.

STANDARD COLOUR **BLACK**



G-Snack Budget Combi

G-SNACK BUDGET COMBI

The perfect combination

Specifically designed for cost-conscious customers, G-Snack Budget Combi is a vending machine that offers the perfect blend of affordability and performance.

Despite its compact footprint, this model features a glass-front G-Snack vending machine with a hidden high-capacity Bottle & Can column mechanism to boost its drinks offering.

Built for durability and reliability, G-Snack Budget Combi is so simple to operate that it ensures seamless functionality in any location.

G-SNACK BUDGET COMBI BB8	
DIMENSIONS H x W x D	1830 x 925 x 840 mm
WEIGHT (NET - Standard machine without options)	335 Kg
NO. OF SELECTIONS PER SHELF	8
NO. OF SHELVES	Standard 6 / Max. 7
NO. OF SELECTIONS	Max. 56 + 2 push buttons
PROTOCOL	Executive / MDB
COOLING SYSTEM CONTROL	Electronic
COOLING UNIT	HCD
INTERNAL TEMPERATURE RANGE	+8 °C up to +16 °C
MAX. POWER CONSUMPTION	250 W
POWER SUPPLY	230/240 V - 50 Hz
CLIMATE CLASS	ST (+18 °C up to +38 °C)
ENERGY CLASS	TEST
ENERGY CONSUMPTION (kWh/annum)	TEST



Eco-Friendly Solution



Affordable



2x
Columns
Pet Bottle 0.5 l




4x
Columns
Can 33 cl


The Budget Combi combines a glass-front G-Snack vending machine with a hidden high-capacity Narrowstack mechanism, enhancing its drink storage and dispensing efficiency.

Product		Quantity per Column
PET BOTTLE 0,50 l	Ø 65 mm H 235 mm	34
CAN 0,33 l	Ø 66 mm H 116 mm	68
MECHANISM TYPE	Narrowstack 4D	

Please note: Please note: the above dimensions are for reference only. Some products, although within the above dimensions, may be difficult to vend due to their shape. Please vend test products before filling the machine.

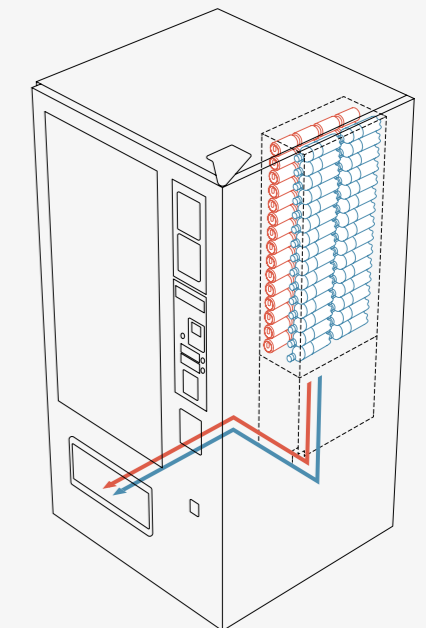

STANDARD COLOUR **BLACK**

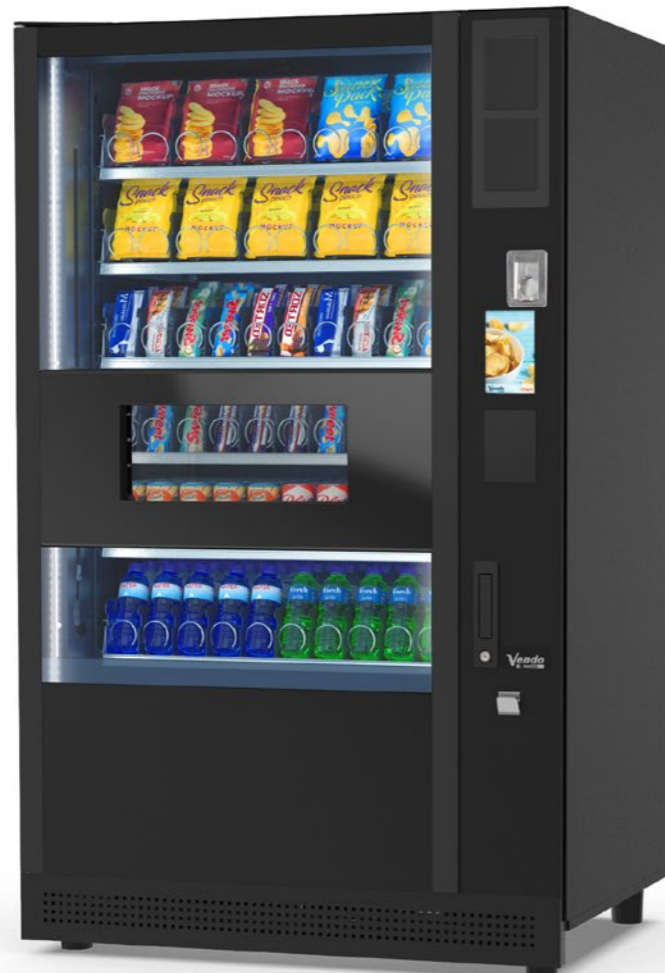

G-Snack Evolution 10



G-SNACK EVOLUTION AMX

DIMENSIONS H x W x D	1830* x 1125 x 890 mm
WEIGHT (NET - Standard machine without options)	340 Kg
NO. OF SELECTIONS PER SHELF	10
NO. OF SHELVES	Standard 6 / Max. 7
NO. OF SELECTIONS	Max. 70
DISPLAY	7" Touch screen
PROTOCOL	Executive / MDB
COOLING SYSTEM CONTROL	Elettronico
COOLING UNIT	HC2
INTERNAL TEMPERATURE RANGE	+2 °C up to +10 °C
MAX. POWER CONSUMPTION	650 W
POWER SUPPLY	230/240 V - 50/60 Hz
CLIMATE CLASS	ST (+18 °C up to +38 °C)
ENERGY CLASS	Cat. 2 Cat. 3 Cat. 4
ENERGY CONSUMPTION (kWh/annum)	975 Cat. 2 1569 Cat. 3 1521 Cat. 4

*With adjustable feet

G-SNACK EVOLUTION

A smarter step forward in vending

Designed for speed, reliability, and ease of use, G-Snack Evolution delivers a fast vend cycle (15–20 seconds) and a smoother, more precise product handling experience.

With its Basket Mode, users can select multiple items and receive them in a single transaction, increasing convenience and boosting average sales.

G-Snack Evolution's internal temperature range (+2 °C up to +10 °C) makes it ideal for drinks, snacks, and various types of food, including fresh vegetables and eggs, safely delivered thanks to the central delivery eyelet providing an ergonomic, user-friendly, and smart vending solution.



Ergonomic Design




User-Friendly



Capacious & Flexible



Reliable

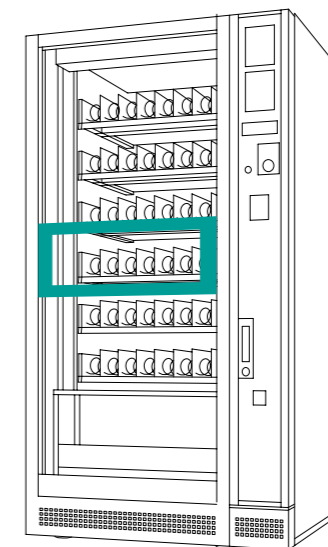

G-Snack Evolution is designed with a motorized central delivery eyelet, providing an ergonomic, user-friendly, and smart vending solution.

Connect up to 4 Slave Machines



STANDARD COLOUR **BLACK**




Back Loader

**BACK LOADER
SBX-H2**

DIMENSIONS H x W x D	1830* x 1125 x 935 mm
WEIGHT (NET - STANDARD MACHINE WITHOUT OPTIONS)	345 KG
NO. OF SELECTIONS PER SHELF	10
NO. OF SHELVES	Min. 4 / Max. 6
NO. OF SELECTIONS	Max. 60
PROTOCOL	Executive / MDB
COOLING SYSTEM CONTROL	Electronic
COOLING UNIT	HCD
INTERNAL TEMPERATURE RANGE	+2 °C up to +10 °C
MAX. POWER CONSUMPTION	460 W
POWER SUPPLY	230 V - 50/60 Hz
CLIMATE CLASS	ST (+18 °C up to +38 °C)
ENERGY CLASS	TBC
ENERGY CONSUMPTION - kWh/annum	TBC

*With adjustable feet

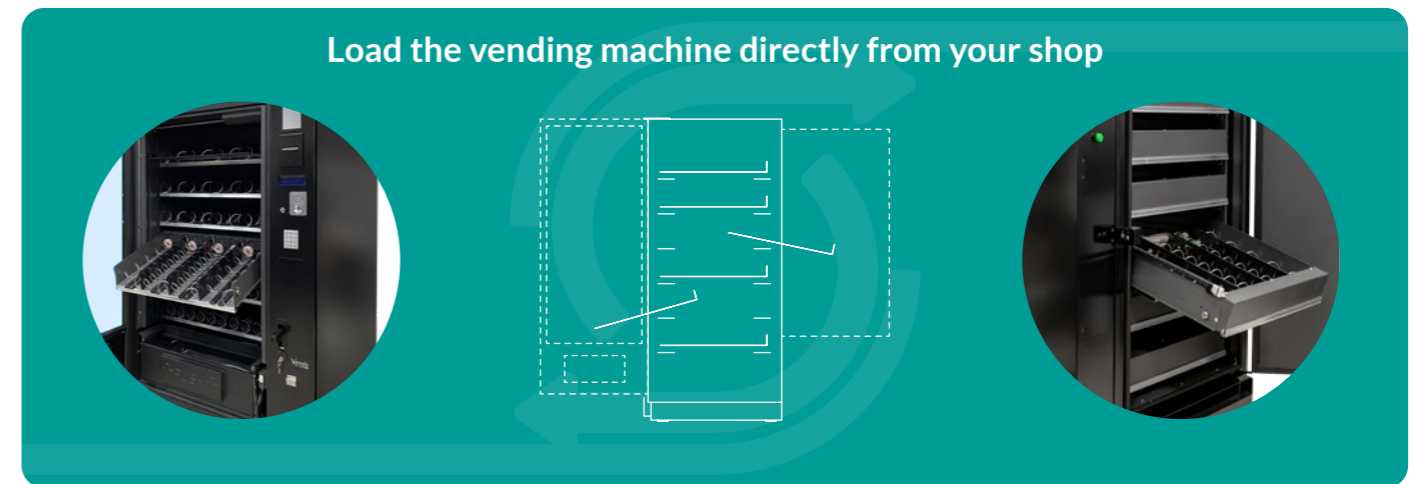

BACK LOADER

Do it smart, back-load it.

Load the vending machine directly from inside your shop!

Forget sudden temperature changes, reduce your workload, and keep the highest hygienic standards: the new Back-Loading system is designed to ease the operations of butcher shop professionals by allowing the product loading process directly from inside the shop into the vending machine.

This versatile system can accommodate a wide range of products, making it ideal for pharmacies, bakeries, and other retail environments looking to extend their merchandising options.

Connect **1**
Slave Machine



Ideal for Butcher Shops

SAFETY IN OPERATION
Our HACCP program and operational green light ensure the highest safety standards at all times.

LED LIGHTING FOR MEAT
Meat products require optimal illumination, our professional LED lighting system enhances their natural colours for maximum appeal.

STANDARD COLOUR **BLACK** ●

Frozen Food

SandenVendo's renowned expertise in cooling technologies today extends to the world of frozen food: meet G-Frozen, our latest vending solution tailored to meet the needs of an increasingly demanding clientele.

Designed to reach sub-zero temperatures, G-Frozen boasts all of SandenVendo's most celebrated features of versatility, along with a new anti-vandal motorized shutter and modular dispensing spirals that adapt to different product types and sizes.



G-Frozen

G-Frozen is SandenVendo's first vending machine with direct HC cooling gas expansion.

To reduce the direct and indirect emission of greenhouse gases and minimize the impact on GWP, G-Frozen is powered by R290 Gas, a natural, eco-friendly refrigerant.

Backed by its flagship expertise in cooling technologies, SandenVendo extends its product range to dispensing frozen food with G-Frozen, a model that boasts a large product capability to meet the rising demand of the frozen market.



G-Frozen
FF8

	G-FROZEN EIGHT (VIII) FF8	G-FROZEN EIGHT (VIII) FF8-S
DIMENSIONS H x W x D	1830*x 1026 x 845 mm	1830*x 1026 x 845 mm
WEIGHT (NET - Standard machine without options)	360 Kg	360 Kg
NO. OF SELECTIONS PER SHELF	4+4	8
NO. OF SHELVES	Standard 5	Standard 5
NO. OF SELECTIONS	Max. 40	Max. 40
DISPLAY	7" Touch screen	7" Touch screen
PROTOCOL	Executive / MDB	Executive / MDB
COOLING SYSTEM CONTROL	Electronic	Electronic
COOLING UNIT	HCD - R290	HCD - R290
INTERNAL TEMPERATURE RANGE	-10 °C up to -25 °C	-10 °C up to -25 °C
MAX. POWER CONSUMPTION	750 W	750 W
POWER SUPPLY	230/240 V - 50/60 Hz	230/240 V - 50/60 Hz
CLIMATE CLASS	4 (+30 °C, 55% R.H.) L1 (-15 °C / -18 °C product in storage section)	4 (+30 °C, 55% R.H.) L1 (-15 °C / -18 °C product in storage section)

* With adjustable feet



Dual Temperature
Ice cream & frozen products or
snacks – use it all year round!



**Circolazione del freddo con lama
d'aria frontale per evitare l'ingresso
di aria calda**



**Massima flessibilità
con le spirali modulari**



**Porta con triplo vetro
resistenza anti-condensa**



**ATEX Compliant
Eco-Friendly Technology**



**Pannello di controllo
completamente personalizzabile
con display touch**

G-FROZEN


Enjoy the brrrreeze

One machine, endless possibilities all year round: thanks to its dual-mode technology, G-Frozen can easily switch from down to -25 °C, to fresh mode up to +5 °C for dispensing snacks, beverages, and dairy products during colder seasons.

This smart system operates in a single optimized mode at a time, ensuring consistent temperature and reliable performance throughout the cabinet. From ice cream to ready meals, gluten-free options, and healthy or vegan products, G-Frozen transforms any location into a high-capacity, high-impact retail point.

Designed for versatility, G-Frozen features modular spiral configurations that adapt to different product types and sizes, along with an anti-vandal motorized shutter for added security.

Connect up to **4**
Slave Machines

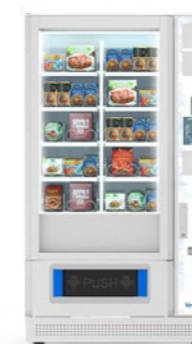

FF8



FF8-S

**G-Frozen is available in two models,
with single or double shelves.**

Choose the double-shelf version to serve frozen regular-size products or the single-shelf version for bulky goods such as ice-cube boxes for cocktails or large frozen pizzas.

STANDARD COLOUR **WHITE**

Cold Drinks



Specially designed for cold sodas, protein shakes, beers, or wine, each model in our G-Drink line lets you serve every type of cold drink with ease.

Customize your G-Drink with age-control features to serve cold champagne in glass bottles on the beach, or load it with 1L sodas for a kids' party at school and keep the party going!



COLD DRINKS PRODUCT RANGE




G-Drink Design Touch




G-Drink Design




G-Drink Standard




B&C Narrowstack




B&C Superstack




B&C Flexstack

OUR G-DRINK DESIGN MODELS ARE CRAFTED TO BE MODULAR AND OVERCOME THE HASSLE OF NARROW DOORWAY TRANSPORTATION.

QUICK & EASY INSTALLATION

The mechanical part of each G-Drink Design can be easily detached from the electronic panel: this feature downsizes the main cabinet by 20 cm.





G-Drink Design 9
Vertical Touch



G-DRINK 9
DESIGN TOUCH
DT9



G-DRINK 6
DESIGN TOUCH
DT6

DIMENSIONS H x W x D	1830* x 1215 x 845 mm	1830* x 940 x 845 mm
WEIGHT (NET - Standard machine without options)	345 kg	295 kg
NO. OF SELECTIONS PER SHELF	9	6
NO. OF SHELVES	Standard 5 / Max. 7	Standard 5 / Max. 7
NO. OF SELECTIONS	Standard 45 / Max. 63	Standard 30 / Max. 42
DISPLAY	7" Touch screen	7" Touch screen
MAX. CAPACITY (0,33 l CANS)	504	336
MAX. CAPACITY (0,50 l PET BOTTLES)	360	240
PROTOCOL	Executive / MDB	Executive / MDB
COOLING SYSTEM CONTROL	Electronic	Electronic
COOLING UNIT	HCD	HCD
INTERNAL TEMPERATURE RANGE	+2 °C up to +10 °C	+2 °C up to +10 °C
MAX. POWER CONSUMPTION	370 W	370 W
CLIMATE CLASS	N (+16 °C up to +32 °C)	N (+16 °C up to +32 °C)
POWER SUPPLY	230/240 V - 50/60 Hz	230/240 V - 50/60 Hz
ENERGY CLASS	A C	A C
ENERGY CONSUMPTION (kWh/annum)	817	624

*With adjustable leveling screw

G-DRINK DESIGN TOUCH

Essentials at your fingertips

Equipped with a vertical lift system and a highly interactive and customizable touch display, G-Drink Touch is the automatic vending machine designed to engage customers and boost your sales.

Created with the aims of a marketing tool, the top-notch touch display holds an attractive, user-friendly multi-selection feature that will persuade customers to purchase more items while providing useful nutritional insights and advertising brand promotions: an advanced control panel that enables you to effortlessly manage the vending machine.

Connect up to **4**
Slave Machines



PET BOTTLES, GLASS BOTTLES, CANS
VENDIBLE PRODUCT SIZE

	Diameter	min. 43.5 mm	max. 73 mm
	Height	min. 88 mm	max. 285 mm
	Weight	min. 185 g	max. 653 g (980 g x6F)

CARTON PACKS (BRICK)
VENDIBLE PRODUCT SIZE

	Width	min. 52 mm	max. 67 mm
	Depth	min. 40 mm	max. 47 mm
	Height	min. 85 mm	max. 134 mm
	Weight	min. 213 g	max. 400 g



Low Energy Impact



User-Friendly



Modular System



High Performance




Reliable



Ergonomic Design

Please note: The above dimensions are for reference only.
Some products, although within the above dimensions, may be difficult to vend due to its shape.
Please vend test products before filling machine.

STANDARD COLOUR **BLACK**

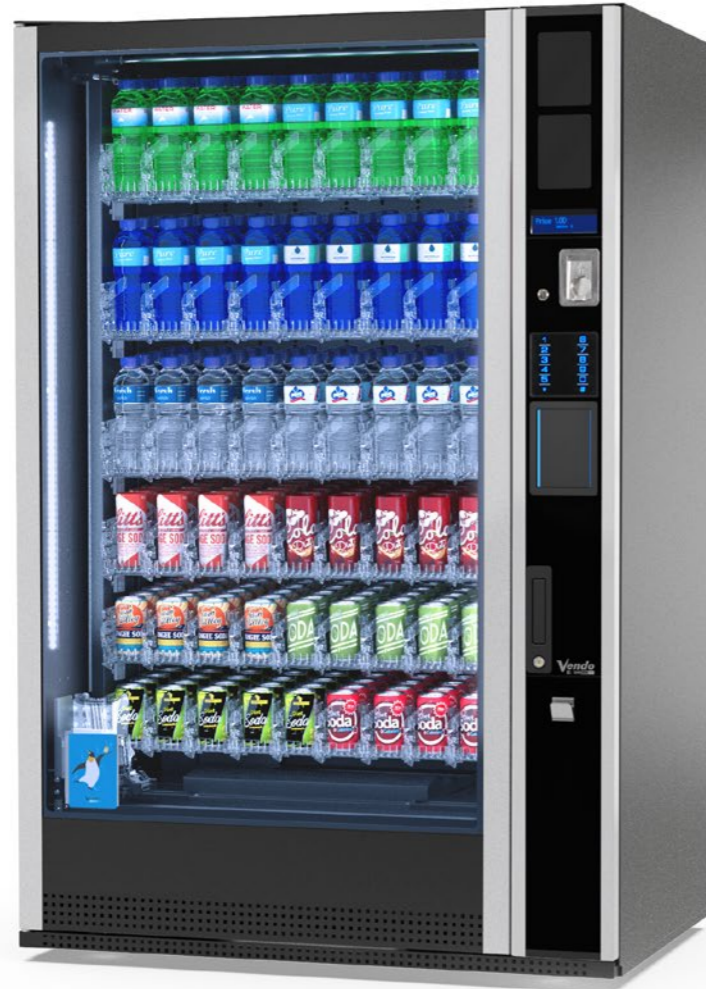

G-Drink Design 9
Vertical



G-DRINK 9
DESIGN
DV9

G-DRINK 6
DESIGN
DC6

DIMENSIONS H x W x D	1830* x 1215 x 845 mm	1830* x 940 x 845 mm
WEIGHT (NET - Standard machine without options)	345 kg	295 kg
NO. OF SELECTIONS PER SHELF	9	6
NO. OF SHELVES	Standard 5 / Max. 7	Standard 5 / Max. 7
NO. OF SELECTIONS	Standard 45 / Max. 63	Standard 30 / Max. 42
MAX. CAPACITY (0,33 l CANS)	504	336
MAX. CAPACITY (0,50 l PET BOTTLES)	360	240
PROTOCOL	Executive / MDB	Executive / MDB
COOLING SYSTEM CONTROL	Electronic	Electronic
COOLING UNIT	HCD	HCD
INTERNAL TEMPERATURE RANGE	+2 °C up to +10 °C	+2 °C up to +10 °C
MAX. POWER CONSUMPTION	370 W	370 W
CLIMATE CLASS	N (+16 °C up to +32 °C)	N (+16 °C up to +32 °C)
POWER SUPPLY	230/240 V - 50/60 Hz	230/240 V - 50/60 Hz
ENERGY CLASS	A G C	A G C
ENERGY CONSUMPTION (kWh/annum)	817	624

*With adjustable leveling screw

G-DRINK DESIGN

Hydro-lution

The most successful glass-front vending machine in our history renovates its look in a modern, sophisticated yet timeless way. Conceived with a new, brighter LED illumination structure to enhance the visibility of the drinks displayed inside, G-Drink Design is equipped with an innovative, back-lit keypad to ease the selection operations in both luminous and even dark venues.

Available in two models, with 9 or 6 selections per shelf, G-Drink Design is geared up with a vertical lift system and all of SandenVendo's top-notch cooling technologies, and an easy door-latching system.

Furthermore, our G-Drink Design allows for dispensing glass bottles such as beer, champagne, and fresh juices at the perfect temperature.

Connect **1**
Slave Machine



PET BOTTLES, GLASS BOTTLES, CANS
VENDIBLE PRODUCT SIZE

	Diameter	min. 43.5 mm	max. 73 mm
	Height	min. 88 mm	max. 285 mm
	Weight	min. 185 g	max. 653 g (980 g x6F)

CARTON PACKS (BRICK)
VENDIBLE PRODUCT SIZE

	Width	min. 52 mm	max. 67 mm
	Depth	min. 40 mm	max. 47 mm
	Height	min. 85 mm	max. 134 mm
	Weight	min. 213 g	max. 400 g

Please note: The above dimensions are for reference only.
Some products, although within the above dimensions, may be difficult to vend due to its shape.
Please vend test products before filling machine.



Low Energy
Impact



User-Friendly



Modular
System



High
Performance



Reliable



Ergonomic
Design

STANDARD COLOUR **BLACK**



G-Drink DM 9
Vertical



G-DRINK 9
STANDARD
DM9

G-DRINK 6
STANDARD
DM6

DIMENSIONS H x W x D	1830* x 1215 x 845 mm	1830* x 940 x 845 mm
WEIGHT (NET - Standard machine without options)	345 kg	295 kg
NO. OF SELECTIONS PER SHELF	9	6
NO. OF SHELVES	Standard 5 / Max. 7	Standard 5 / Max. 7
NO. OF SELECTIONS	Standard 45 / Max. 63	Standard 30 / Max. 42
MAX. CAPACITY (0,33 l CANS)	504	336
MAX. CAPACITY (0,50 l PET BOTTLES)	360	240
PROTOCOL	Executive / MDB	Executive / MDB
COOLING SYSTEM CONTROL	Electronic	Electronic
COOLING UNIT	HCD	HCD
INTERNAL TEMPERATURE RANGE	+2 °C up to +10 °C	+2 °C up to +10 °C
MAX. POWER CONSUMPTION	370 W	370 W
POWER SUPPLY	N (+16 °C up to +32 °C)	N (+16 °C up to +32 °C)
CLIMATE CLASS	230/240 V - 50/60 Hz	230/240 V - 50/60 Hz
ENERGY CLASS	A G C	A G C
ENERGY CONSUMPTION (kWh/annum)	817	624

*With adjustable leveling screw.

G-DRINK STANDARD

Elevate your vending standards

Contrary to the popular belief that standard means less, our G-Drink Standard model is an automatic vending machine that leaves nothing to be desired from other models on the market.

Equipped with SandenVendo's flagship cooling technologies and a vertical lift system, G-Drink Standards is available in two spacious models with 9 or 6 selections per shelf, and each model comes with a new LED illumination structure designed to enhance the visibility of the drinks displayed inside.

Furthermore, our G-Drink Standard allows for dispensing glass bottles such as beer, champagne, and fresh juices at the perfect temperature.

Connect **1**
Slave Machine




PET BOTTLES, GLASS BOTTLES, CANS VENDIBLE PRODUCT SIZE



Diameter	min. 43.5 mm	max. 73 mm
Height	min. 88 mm	max. 285 mm
Weight	min. 185 g	max. 653 g (980 g x6F)

CARTON PACKS (BRICK) VENDIBLE PRODUCT SIZE



Width	min. 52 mm	max. 67 mm
Depth	min. 40 mm	max. 47 mm
Height	min. 85 mm	max. 134 mm
Weight	min. 213 g	max. 400 g



Low Energy
Impact



User-Friendly



Modular
System



High
Performance



24/7
Reliable



Ergonomic
Design

Please note: The above dimensions are for reference only.
Some products, although within the above dimensions, may be difficult to vend due to its shape.
Please vend test products before filling machine.

STANDARD COLOUR **BLACK**



XS-C36

B&C DESIGN NARROWSTACK

The most eco-friendly vending solution

SandenVendo owes its popularity to a reliable mechanism technology and the premium cooling units applied on each of its vending models since the 1930s.

The Bottle&Can automatic vending machine represents a true flagship in terms of quality standards and durability: this simple yet functional column vendor today is upgraded with modern features and a user-friendly interface.

In addition, always considering environmental sustainability, B&C Design Narrowstack has been developed with an HC (R290) Hydro Carbon version, pursuing the commitment to employing natural refrigerants on our vending machines.

Upgrade your B&C with the IP34-compliant Outdoor kit: a solution with rain protection panels and integrated drainage channels for optimal performance.



B&C DESIGN NARROWSTACK 10 L-C4X **B&C DESIGN NARROWSTACK 8 M-C48** **B&C DESIGN NARROWSTACK 7 S-C47** **B&C DESIGN NARROWSTACK 6 XS-C36**

DIMENSIONS H x W x D	1830 x 1015 x 955 mm	1830 x 850 x 955 mm	1830 x 750 x 955 mm	1830 x 650 x 800 mm
WEIGHT (NET - Standard machine without options)	375 kg	340 kg	300 kg	280 kg
NO. OF SELECTIONS / COLUMNS	10	8	7	6
PROTOCOL	Executive / MDB	Executive / MDB	Executive / MDB	Executive / MDB
COOLING SYSTEM CONTROL	Electronic	Electronic	Electronic	Electronic
COOLING UNIT	HCD	HCD	HCD	HCD
PROGRAMMABLE TEMPERATURE RANGE	+1 °C up to +25 °C	+1 °C up to +25 °C	+1 °C up to +25 °C	+1 °C up to +25 °C
MAX. POWER CONSUMPTION	320 W	320 W	320 W	320 W
POWER SUPPLY	220/240 V - 50 Hz	220/240 V - 50 Hz	220/240 V - 50 Hz	220/240 V - 50 Hz
CLIMATE CLASS	N (+16 °C up to +32 °C)	N (+16 °C up to +32 °C)	N (+16 °C up to +32 °C)	N (+16 °C up to +32 °C)
ENERGY CLASS				
ENERGY CONSUMPTION (kWh/annum)	577	550	507	566

CAPACITIES		L-C4X	M-C48	S-C47	XS-C36
PET BOTTLE 0,50 l	Ø 65 mm H 235 mm	340	272	237	102
SLIM CAN 0,25 l	Ø 53 mm H 135 mm	750	600	525	300
CAN 0,33 l	Ø 66 mm H 116 mm	680	544	476	306
SLEEK CAN 0,33 l	Ø 57,5 mm H 146 mm	570	456	399	228
PRODUCT DIMENSIONS	Diameter Ø	min 52 > max 72 mm	min 52 > max 72 mm	min 52 > max 72 mm	min 52 > max 72 mm
	Height	min 80 > max 355 mm	min 80 > max 355 mm	min 80 > max 355 mm	min 80 > max 355 mm
MECHANISM TYPE	Narrowstack	4D	4D	4D	3D

*Please note: The above dimensions are for reference only.
Some products, although within the above dimensions, may be difficult to vend due to its shape.
Please vend test products before filling machine.*





C26

**B&C DESIGN
SUPERSTACK
C26**

DIMENSIONS H x W x D	1830 x 1015 x 750 mm
WEIGHT (NET - Standard machine without options)	390 kg
NO. OF SELECTIONS / COLUMNS	6
PROTOCOL	Executive / MDB
COOLING SYSTEM CONTROL	Electronic
COOLING UNIT	HCD
PROGRAMMABLE TEMPERATURE RANGE	+1 °C up to +25 °C
MAX. POWER CONSUMPTION	320 W
POWER SUPPLY	220/240 V - 50/60 Hz
CLIMATE CLASS	N (+16 °C up to +32 °C)
ENERGY CLASS	A C
ENERGY CONSUMPTION (kWh/annum)	625

CAPACITIES

		C26
GLASS BOTTLE 0,50 l	Ø 65 mm H 235 mm	180
PET BOTTLE 0,50 l	Ø 65 mm H 235 mm	180
CAN 0,33 l	Ø 66 mm H 116 mm	360
PRODUCT DIMENSIONS	Diameter Ø	min 57,6 > max 72,5 mm
	Height	min 116 > max 295 mm
MECHANISM TYPE	Superstack	2D

*Please note: The above dimensions are for reference only.
Some products, although within the above dimensions, may be difficult to vend due to its shape.
Please vend test products before filling machine.*



B&C DESIGN SUPERSTACK

A smarter, greener choice

The SuperStack C26 is designed to meet the growing demand for glass bottle vending, particularly in the DACH region, in line with government policies promoting recycling and material reusability for a more sustainable future.

This robust, plug-and-play vending machine ensures effortless operation, featuring a time-tested mechanism that has been trusted in the market for decades. Its reliable technology guarantees smooth performance while maintaining the highest quality standards and environmental responsibility.

Reaffirming our commitment to sustainability, this popular model is now returning in an eco-friendly HC (R290) Hydro Carbon version, further strengthening our dedication to natural refrigerants and environmentally conscious vending solutions.

Promotes reuse & recycling

Aligned with EU Green Deal targets

Designed per EU Packaging & Waste Directive

Compatible with DRS (Deposit Return System) - ready for seamless deposit returns



**Eco-Friendly
Solution**



Reliable



Affordable



**Over 40 Years
Guaranteed Quality**



Plug & Play

STANDARD COLOUR **BLACK**



CFX

B&C DESIGN FLEXSTACK

The ultimate vending gateway

Backed by SandenVendo's experience in the vending industry including the patented top-notch cooling technologies applied on each vending machine produced, Bottle&Can Design Flexstack is an automatic vending machine developed to handle 1L and 1.5L bottles in the most effective and flexible way.

Thanks to an advanced cooling system that exploits HC (R290), a natural and eco-friendly refrigerant solution, B&C Design Flexstack is a simple, smart automatic vending machine that minimizes overall maintenance.

Upgrade your B&C with the IP34-compliant Outdoor kit: a solution with rain protection panels and integrated drainage channels for optimal performance.

B&C DESIGN FLEXSTACK CFX-FLEX	
DIMENSIONS H x W x D	1830 x 1015 x 955 mm
WEIGHT (NET - Standard machine without options)	375 kg
NO. OF SELECTIONS	10
NO. OF MODULES	From 5 to 7
PROTOCOL	Executive / MDB
COOLING UNIT	HCD
PROGRAMMABLE TEMPERATURE RANGE	+1 °C up to +25 °C
MAX. POWER CONSUMPTION	320 W
POWER SUPPLY	220/240 V - 50 Hz
CLIMATE CLASS	N (+16 °C up to +32 °C)
ENERGY CLASS	A B
ENERGY CONSUMPTION (kWh/annum)	577

CAPACITIES: VENDABLE / PRE-COOL	WIDE STACK*	NARROW STACK**
CAN 0,33 l	87 / 3 (3D)	51 / 3 (3D)
PET BOTTLE 0,50 l	29 / 1 (1D)	17 / 1 (1D)
PET BOTTLE 1,00 l	22-24 / 1 (1D)	-
PET BOTTLE 1,50 l	16-18 / 1 (1D)	-

* WIDE STACK Product dimensions: Ø Min. 66 mm - Max. 90 mm, length 345 mm ** NARROW STACK Product dimensions: Ø Min. 52 mm - Max. 72 mm, length 355 mm
N.B. Capacities will vary based on the shape and dimension of the product.

5 Wide Stacks

5x
PET BOTTLE 1.5 l

6 Wide Stacks

6x
PET BOTTLE 1 l

4 Narrow + 3 Wide Stacks

4x CAN 33 cl or PET BOTTLE 0.5 l
+ 3x PET BOTTLE 1.5 l

Eco-Friendly Solution

Reliable

Affordable

Plug & Play

24/7

Over 40 Years
Guaranteed Quality

Hot Drinks & Coffee

The perfect companion to a G-Snack, our G-Caffè range is designed to deliver freshly brewed espresso and hot drinks at your preferred temperature: warm, hot, or very hot!

Each model features a customizable, interactive, and user-friendly 7" or 18.5" touchscreen selection panel and offers both cash and cashless payment options.

Additionally, every unit can be branded with graphics to match any existing interior design style.



HOT DRINKS & COFFEE PRODUCT RANGE



 G-Caffè UNI-Q Touch



 G-Caffè UNI-Q



PROPER ITALIAN ESPRESSO

SandenVendo's coffee brewer is specially designed to deliver the authentic flavors and aromas of Italian espresso in every cup. Customize your brewer with one or two canisters to offer a variety of coffee options with the same G-Caffè machine.



ONE CUP, ONE TEMPERATURE

Our Temperature Management System allows customers to adjust the temperature of their hot drink, choosing from warm, hot, or very hot.



LOW ENERGY CONSUMPTION

Innovative temperature management with SandenVendo Instant Heater technology. It is an energy efficient design with very low thermal mass and does not require a Stand-by function. The system always uses fresh water providing the precise amount required for each drink.



G-Caffè UNI-Q
Touch

G-CAFFÈ UNI-Q TOUCH

Your coffee break just got better

Created with the customers' needs in mind, G-Caffè UNI-Q Touch is equipped with a new, 18" touch display with a disability-friendly interface.

Connect a G-Snack Slave machine to the new G-Caffè UNI-Q Touch and provide customers with a full array of snacks to match their hot drinks; the new 18.5" touch display will collect each multi-purchasing order and guide the users throughout the entire operation while showcasing product offers, nutrition facts and graphic contents of your choice.

Connect up to **4**
Slave Machines



	G-CAFFÈ UNI-Q TOUCH ESPRESSO HS 7T		G-CAFFÈ UNI-Q TOUCH INSTANT HN 7T	
DIMENSIONS H x W x D	1830 x 655 x 770 mm		1830 x 655 x 770 mm	
WEIGHT (NET - Standard machine without options)	180 kg		180 kg	
CUP TYPES	Ø 70-73 mm	Ø 80 mm	Ø 70-73 mm	Ø 80 mm
CUPS (pcs)	Up to 750	Up to 550	Up to 750	Up to 550
STIRRER (90/105/115 mm)	500 pcs		500 pcs	
NO. OF SELECTIONS	22		22	
PRE-SELECTION	1 (Sugar)		1 (Sugar)	
INGREDIENT CANISTER	6x M size (4,4 l)		8x M size (4,4 l)	
DISPLAY	18.5" Touch screen		18.5" Touch screen	
WATER FITTING CONNECTION	G 3/4" 2-8 bar (0,2 Mpa – 0,8 Mpa)		G 3/4" 2-8 bar (0,2 Mpa – 0,8 Mpa)	
PROTOCOL	MDB / Executive		MDB / Executive	
INSTANT HEATER (RATED POWER)	1x 2300W (Espresso) 1x 3200W (Powder)		1x 3200W	
POWER SUPPLY	220-240 V / 50-60 Hz		220-240 V / 50-60 Hz	
MAX. POWER CONSUMPTION	134 Wh/L		134 Wh/L	

*Energy consumption in Wh per liter of Espresso dispensed

MAIN COMPONENTS	QUANTITY	CAPACITY
COFFEE BEANS CONTAINER	1	4.9 kg (single) - 5.1 kg (double)
GRINDER (STANDARD)	1	Professional Conic blade
SUGAR CONTAINER IN CUP	1	5.8 l - 5 kg

PRODUCT	CANISTER SIZE (4,4 l)
SUGAR	3.8 Kg
POWDER MILK	1.4 Kg
CHOCOLATE	3.3 Kg
LEMON TEA	4.4 Kg
GINSENG TEA	2.2 Kg
DECAF. COFFEE	2.2 Kg
INSTANT COFFEE	2.2 Kg
BARLEY COFFEE	0.6 Kg



USER INTERFACE

LED door panel illumination
Ergonomic design for children and wheelchair users
Flexible cup dispenser available as standard
70-73 mm (option 80 mm)
Capacity to accommodate up to 3 payment system together
Linux OS
Master - slave connections with G-Snack slave machine



MAINTENANCE

SW update through USB
Easy pull out drawer for quick maintenance
24 VDC devices (except heater, grinder, pump)



User-friendly 18.5" touch screen

Created with the customers' needs in mind



Patented Solution



User-Friendly

STANDARD COLOUR **BLACK**



G-Caffè UNI-Q

G-CAFFÈ UNI-Q

Uniqueness at a glance

Enjoy an authentic Italian espresso: G-Caffè UNI-Q is the freestanding coffee vending machine that extracts all the essence of coffee to its utmost flavour thanks to its ingeniously designed espresso brewer.

Equipped with an innovative temperature management system with an instant heater, G-Caff. UNI-Q is an energy-efficient coffee machine with low thermal mass to allow for continuous drink preparation without interruption.

Available with the original coffee brewer or instant powder supply, both models come with an innovative touch display selection.

Connect up to **4**
Slave Machines



	G-CAFFÈ UNI-Q ESPRESSO HS 7		G-CAFFÈ UNI-Q INSTANT HN 7	
DIMENSIONS H x W x D	1830 x 655 x 770 mm		1830 x 655 x 770 mm	
WEIGHT (NET - Standard machine without options)	180 kg		180 kg	
CUP TYPES	Ø 70-73 mm	Ø 80 mm	Ø 70-73 mm	Ø 80 mm
CUPS (pcs)	Up to 750	Up to 550	Up to 750	Up to 550
STIRRER (90/105/115 mm)	500 pcs		500 pcs	
NO. OF SELECTIONS	22		22	
PRE-SELECTION	1 (Sugar)		1 (Sugar)	
INGREDIENT CANISTER	6x M size (4,4 l)		8x M size (4,4 l)	
DISPLAY	7" Touch screen		7" Touch screen	
WATER FITTING CONNECTION	G 3/4" 2-8 bar (0,2 Mpa – 0,8 Mpa)		G 3/4" 2-8 bar (0,2 Mpa – 0,8 Mpa)	
PROTOCOL	MDB / Executive		MDB / Executive	
INSTANT HEATER (RATED POWER)	1x 2300W (Espresso) 1x 3200W (Powder)		1x 3200W	
POWER SUPPLY	220-240 V / 50-60 Hz		220-240 V / 50-60 Hz	
MAX. POWER CONSUMPTION	134 Wh/L		134 Wh/L	

*Energy consumption in Wh per liter of Espresso dispensed

MAIN COMPONENTS	QUANTITY	CAPACITY
COFFEE BEANS CONTAINER	1	4.9 kg (single) - 5.1 kg (double)
GRINDER (STANDARD)	1	Professional Conic blade
SUGAR CONTAINER IN CUP	1	5.8 l - 5 kg

PRODUCT	CANISTER SIZE (4,4 l)
SUGAR	3.8 Kg
POWDER MILK	1.4 Kg
CHOCOLATE	3.3 Kg
LEMON TEA	4.4 Kg
GINSENG TEA	2.2 Kg
DECAF. COFFEE	2.2 Kg
INSTANT COFFEE	2.2 Kg
BARLEY COFFEE	0.6 Kg



INNOVATION

- Individual drink temperature setting
- Temperature pre-selection
- Easy regular maintenance via touch panel
- Coffee container flex system
- Large VFD (vacuum fluorescent graphic display)
- Variable speed mixers
- Variable speed ingredient motors



USER INTERFACE

- LED door panel illumination
- Ergonomic design for children and wheelchair users
- Flexible cup dispenser available as standard 70-73 mm (option 80 mm)
- Capacity to accommodate up to 3 payment system together Linux OS
- Master - slave connections with G-Snack slave machine



MAINTENANCE

- SW update through USB
- Easy pull out drawer for quick maintenance
- 24 VDC devices (except heater, grinder, pump)



Patented Solution



User-Friendly

STANDARD COLOUR **BLACK**

Shop Solutions

**YOUR NEW VENDING ALLIES ARE SOLID
AND ALWAYS OPEN.**



**Vending solutions for automated retail shops, 24/7 mini-markets,
corporate offices, shopping malls, and more.**

**Customize your vending corner with the model that best fits your
business and customers and unleash your vending potential.**

Boost every customer's shopping experience with creativity, guaranteeing effortless access to drinks, snacks and merchandise anytime, without compromise!




**Brain
Multi Module
Vendor**

Each BRAIN (available on all our touchscreen machines) can manage up to four connectable units, such as G-Snack, G-Drink, G-Frozen or Locker.

Combine different vending models to build a fully automated retail shop that performs like a mini convenience store. Offer a diverse range of products, from Extra Vending items and merchandise to bulky goods, work accessories, and even temperature-sensitive foods-all with seamless efficiency!



**Shop
24 hours**

**Shop
24 hours**

For the Boldest Vending Dreamers

From fresh food to travel essentials, pet supplies and pharmacy items, our Shop Solutions can accommodate any type of merchandise thanks to the extensive range of products available including coffee and hot beverage machines.



Don't think twice! Choose SandenVendo's **Shop Solutions** to setup your new, versatile indoor high-tech corner around the world.



Travel & Leisure

Set up a fully automated 24/7 shop in high-traffic locations like airports, bus stations, and transit hubs to provide travelers with last-minute essentials such as tech devices, snacks, and travel pillows.


Need more space? Our Lockers can easily accommodate large, bulky items at room temperature.



Beauty & Wellness

The success of automated vending shops is often linked to the privacy they offer customers.

Capitalize on this advantage by offering first-aid essentials, beauty products, and prescription-free medications, providing a discreet and convenient 24/7 solution for those who value privacy.

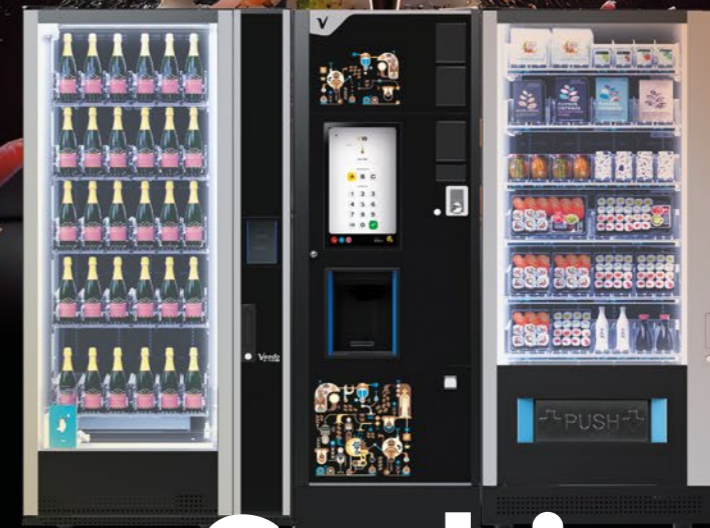

Sushi & Champagne

Who says vending can't be fun?

Unleash your creativity and design a themed automated shop stocked with products carefully curated for romantic moments and celebrations of all kinds.

How? Pair a G-Drink filled with champagne with a G-Snack stocked with premium sushi, and add a Locker full of irresistible gift boxes.



Iced & Frozen

Our expertise in developing cutting-edge cooling technologies has driven us to create an advanced vending solution for frozen and iced goods.

Whether it's artisanal or packaged ice cream, cocktail ice bags, wholesome ready-to-eat meals, or classic pizzas for late-night cravings, our G-Frozen range is designed to accommodate a diverse selection of frozen products with convenience and efficiency.



Fashion & Branding

Who would have thought vending machines could be the next big thing in advertising? Turn them into powerful marketing tools by customizing your 24/7 automated shop with branded graphics, capturing the curiosity of customers worldwide.



	BRAIN MMV
DIMENSIONS H x W x D	1830*x 400 x 815 mm
WEIGHT (NET - Standard machine without options)	105 Kg
DISPLAY	TOUCH SCREEN 18.5"
PROTOCOL	Executive / MDB
MAX. POWER CONSUMPTION	50 W
POWER SUPPLY	220/240 V - 50/60 Hz

*With adjustable leveling screw



Maximum Flexibility



User-Friendly




24/7 Unmanned Service



Perfect Control



Affordable

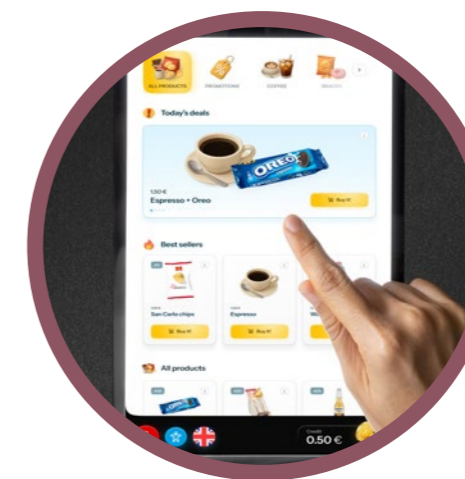

■ BRAIN (MULTI MODULE VENDOR)

One brain, infinite personalities.

Manage up to four slave machines with one Brain: an interactive and user-friendly central unit equipped with an 18.5" touchscreen panel connected to each vending machine.


For example, you could choose a G-Snack Evolution to dispense fresh, bulky farm products like eggs, and connect it to a Locker to showcase baskets of assorted local products.

You could also opt for a G-Caffé UNI-Q for premium coffee and hot beverages, connected to G-Drink and G-Snack, allowing your customers to enjoy all-time favorites like cold sodas and crisps without compromise.



Connect up to **4** Slave Machines

STANDARD COLOUR **BLACK** ●

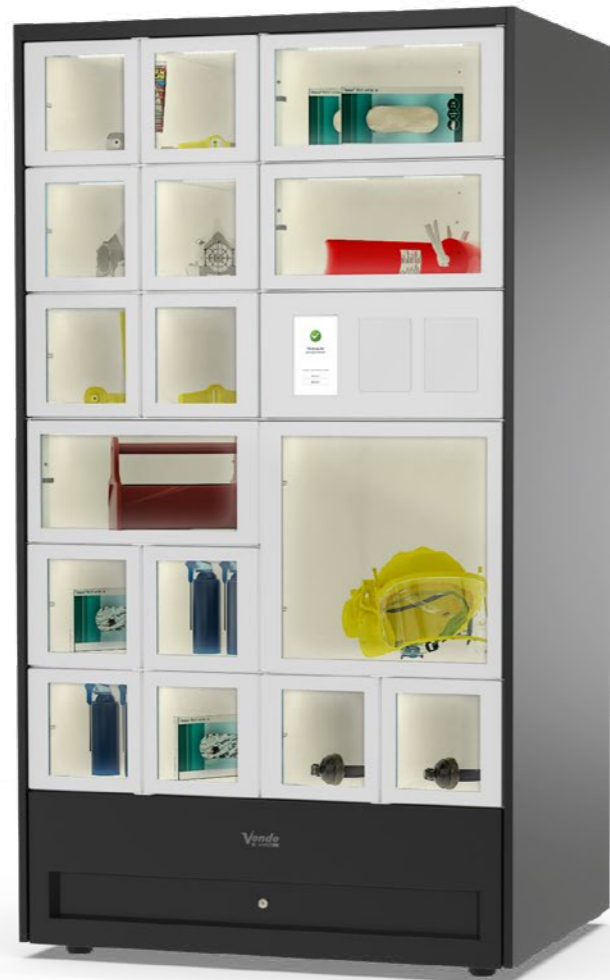

MATRIX LOCKER

Modularity made simple. Flexibility made visible.

Available in Master and Slave configurations, the SandenVendo Matrix Locker allows you to create fully integrated, scalable automated retail environments tailored to modern consumer needs.

Designed to handle Extra Vending, bulky items, and unconventional products, Locker transforms any location into a smart retail space, ideal for 24/7 unattended sales.

As a Master unit, Locker acts as the central control point, featuring a touchscreen and a payment system panel. As a Slave unit, it can be connected to a master unit and other SandenVendo slave machines for premium vending setups. Its transparent modules allow for modular configuration, ensuring high capacity and an intuitive user experience, with full product visibility before purchase.

**MATRIX LOCKER
M-LCK**

DIMENSIONS H x W x D	1830* x 1050 x 785 mm
WEIGHT (NET/GROSS - Standard machine without options)	300 Kg
NO. OF SELECTIONS PER SHELF	Max. 4
NO. OF SHELVES	6
NO. OF SELECTIONS	Max. 24
DISPLAY	7" Touch screen
MAX. POWER CONSUMPTION	50 W
POWER SUPPLY	220/240 V - 50/60 Hz

*With adjustable leveling screw

**PLUG & PLAY
MODULARITY**


The Locker boasts a smart modular architecture that evolves with your business: each module can be removed and replaced in seconds thanks to a practical fixing system with only two screws and adjustable sliding guides, ensuring zero downtime reconfiguration.



Simple replacement in 2 steps


Flexibility comes with various configurations

Modules are available in different sizes (**small, medium, large**) and are equipped with an insulated structure to protect product quality and an integrated LED lighting for maximum visibility.

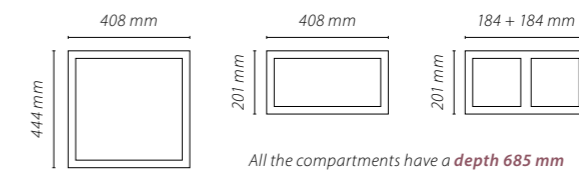

- » Fast module replacement
- » Easy maintenance
- » Flexible configuration
- » Premium presentation with glass-fronted modules
- » Enhanced product visibility with internal light

A smart system that evolves with your needs.

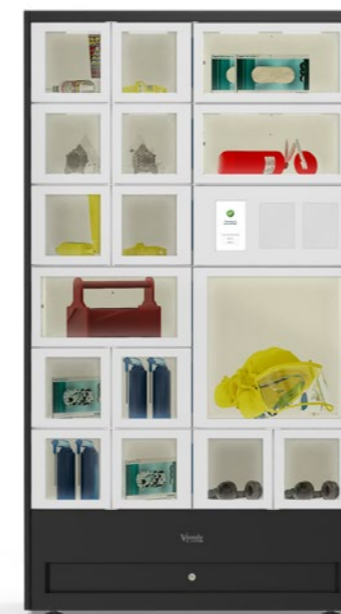

Outdoor Line

**OUR VENDING SOLUTIONS WITH
A PASSION FOR THE OUTDOORS**



Feeling hungry on a mountaintop?

With our G-Snack and G-Drink Outdoor models, customers can enjoy snacks and drinks while surrounded by breathtaking views.

IP34 rainproof certified, each machine is equipped with vandal-proof protection, a heated glass, an internal circuit breaker and a roof.

An anti-condensation and anti-frost system make it ideal for installation in any OUTDOOR location!

Endurance & Safety

SandenVendo's Outdoor line of vending machines is known for its durability and versatility. Think outside the box and install one in unexpected places where it's most needed!

Each model is powered by R290 Natural Gas, an eco-friendly solution that allows it to blend seamlessly into any environment while withstanding extreme temperature conditions.



Extra Protection with Robust Lexan Outer Door



Roof



Thermal Breaker



Cooling Unit With Heater



Anti-Freezing Function



Rainproof IP34



Anti-Vandal Key Pad And Slide Coin Insert



Heated Glass Anti-Condensation



Led Illumination



OUTDOOR LINE PRODUCT RANGE



G-Snack Outdoor Touch



G-Snack Outdoor



G-Drink Outdoor Touch



G-Drink Outdoor



G-Snack ST8 OD



	G-SNACK TOUCH TEN (X) OUTDOOR STX OD	G-SNACK TOUCH EIGHT (VIII) OUTDOOR ST8 OD	G-SNACK TOUCH SIX (VI) OUTDOOR ST6 OD
DIMENSIONS H x W x D	1900 x 1200 x 1010 mm	1900 x 1030 x 1010 mm	1900 x 890 x 1010 mm
WEIGHT (NET - Standard machine without options)	400 kg	350 kg	325 kg
NO. OF SELECTIONS PER SHELF	10	8	6
NO. OF SHELVES	Standard 6 / Max. 7	Standard 6 / Max. 7	Standard 6 / Max. 7
NO. OF SELECTIONS	Max. 70	Max. 56	Max. 42
DISPLAY	7" Touch screen	7" Touch screen	7" Touch screen
PROTOCOL	Executive / MDB	Executive / MDB	Executive / MDB
COOLING SYSTEM CONTROL	Electronic	Electronic	Electronic
COOLING UNIT	HCD	HCD	HCD
INTERNAL TEMPERATURE RANGE	+2 °C up to +18 °C	+2 °C up to +18 °C	+2 °C up to +18 °C
AMBIENT TEMPERATURE RANGE	-15 °C up to +38 °C	-15 °C up to +38 °C	-15 °C up to +38 °C
MAX. POWER CONSUMPTION	450 W	450 W	450 W
POWER SUPPLY	230/240 V - 50/60 Hz	230/240 V - 50/60 Hz	230/240 V - 50 Hz
ENERGY CLASS	Cat. 2 Cat. 3 Cat. 4	Cat. 2 Cat. 3 Cat. 4	Cat. 2 Cat. 3 Cat. 4
ENERGY CONSUMPTION (kWh/annum)	1553 Cat. 2 1836 Cat. 3 1714 Cat. 4	1232 Cat. 2 1619 Cat. 3 1414 Cat. 4	1280 Cat. 2 1518 Cat. 3 1545 Cat. 4

G-SNACK TOUCH OUTDOOR

Designed for workers, joggers and wanderers

Once again, the most versatile vending machine of all time has just outdone itself. Now available with top-notch touch screen display designed for quick and multi-purchasing operations, G-Snack Touch Outdoor represents a safe, smart and innovative choice for satisfying large array of customers needs.

From drinks and edibles of all sorts, including freshly harvested products for a healthy lunch in the park or a last-minute family picnic, G-Snack Touch Outdoor can accommodate a broad variety of products including Extra Vending items such as protection materials, hi-tech devices or pet food: you decide!



User-Friendly



Roof



Reliable




Rainproof IP34



Heated Glass



Maximum Flexibility

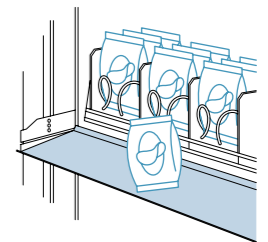

SPEEDY LIFT

Delicate and fragile products can be securely dispensed at eye level for maximum convenience. Plus, our system ensures fast and efficient delivery every time!

Connect up to **4**
Slave Machines



STANDARD COLOUR **BLACK**



G-Snack SM8 OD



	G-SNACK TEN (X) OUTDOOR SMX OD	G-SNACK EIGHT (VIII) OUTDOOR SM8 OD	G-SNACK SIX (VI) OUTDOOR SM6 OD
DIMENSIONS H x W x D	1900 x 1200 x 1010 mm	1900 x 1030 x 1010 mm	1900 x 890 x 1010 mm
WEIGHT (NET - Standard machine without options)	400 kg	350 kg	325 kg
NO. OF SELECTIONS PER SHELF	10	8	6
NO. OF SHELVES	Standard 6 / Max. 7	Standard 6 / Max. 7	Standard 6 / Max. 7
NO. OF SELECTIONS	Max. 70	Max. 56	Max. 42
PROTOCOL	Executive / MDB	Executive / MDB	Executive / MDB
COOLING SYSTEM CONTROL	Electronic	Electronic	Electronic
COOLING UNIT	HCD	HCD	HCD
INTERNAL TEMPERATURE RANGE	+2 °C up to +18 °C	+2 °C up to +18 °C	+2 °C up to +18 °C
AMBIENT TEMPERATURE RANGE	-15 °C up to +38 °C	-15 °C up to +38 °C	-15 °C up to +38 °C
MAX. POWER CONSUMPTION	450 W	450 W	450 W
POWER SUPPLY	230/240 V - 50/60 Hz	230/240 V - 50/60 Hz	230/240 V - 50 Hz
ENERGY CLASS	Cat. 2 Cat. 3 Cat. 4	Cat. 2 Cat. 3 Cat. 4	Cat. 2 Cat. 3 Cat. 4
ENERGY CONSUMPTION (kWh/annum)	1553 Cat. 2, 1836 Cat. 3, 1714 Cat. 4	1232 Cat. 2, 1619 Cat. 3, 1414 Cat. 4	1280 Cat. 2, 1518 Cat. 3, 1545 Cat. 4

G-SNACK OUTDOOR

Outdoor snacking? Solved.

Crafted with premium materials and equipped with top-notch technological features, G-Snack Outdoor represents the safest and smartest way to pursue your automatic outdoor vending business.

Backed by SandenVendo's expertise in thermo-dynamics and cooling systems, G-Snack Outdoor comes with a thermal-magnetic circuit breaker and a temperature controller specially designed to operate under severe weather conditions.

This IP34 anti-rain-certified model comes with heated anti-condensation glass, a new anti-vandal design, and a smart LED illumination system.


Connect **1**
Slave Machine



Roof



Heated Glass

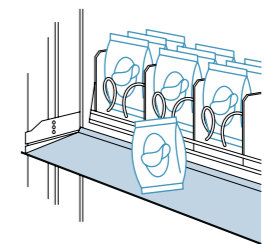

SPEEDY LIFT

Delicate and fragile products can be securely dispensed at eye level for maximum convenience. Plus, our system ensures fast and efficient delivery every time!



Rainproof
IP34



Reliable



Maximum
Flexibility

STANDARD COLOUR **BLACK** ●



G-Drink DT 9 OD
Vertical Outdoor



G-DRINK 9
OUTDOOR TOUCH
DT9 OD



G-DRINK 6
OUTDOOR TOUCH
DT6 OD

DIMENSIONS H x W x D	1875* x 1260 x 1010 mm	1875* x 990 x 1010 mm
WEIGHT (NET - Standard machine without options)	410 kg	350 kg
NO. OF SELECTIONS PER SHELF	9	6
NO. OF SHELVES	Standard 5 / Max. 7	Standard 5 / Max. 7
NO. OF SELECTIONS	Standard 45 / Max. 63	Standard 30 / Max. 42
DISPLAY	7" Touch screen	7" Touch screen
MAX. CAPACITY (0,33 l CANS)	504	336
MAX. CAPACITY (0,50 l PET BOTTLES)	360	240
PROTOCOL	Executive / MDB	Executive / MDB
COOLING SYSTEM CONTROL	Electronic	Electronic
COOLING UNIT	HCD	HCD
INTERNAL TEMPERATURE RANGE	+2 °C up to +10 °C	+2 °C up to +10 °C
AMBIENT TEMPERATURE RANGE	-15 °C up to +38 °C	-15 °C up to +38 °C
MAX. POWER CONSUMPTION	490 W	490 W
POWER SUPPLY	230/240 V - 50/60 Hz	230/240 V - 50/60 Hz
ENERGY CLASS		
ENERGY CONSUMPTION (kWh/annum)	1700	1290

*With adjustable leveling screw.



PET BOTTLES, GLASS BOTTLES, CANS
VENDIBLE PRODUCT SIZE

Diameter	min. 43.5 mm	max. 73 mm
Height	min. 88 mm	max. 285 mm
Weight	min. 185 g	max. 653 g (980 g x6F)

CARTON PACKS (BRICK)
VENDIBLE PRODUCT SIZE

Width	min. 52 mm	max. 67 mm
Depth	min. 40 mm	max. 47 mm
Height	min. 85 mm	max. 134 mm
Weight	min. 213 g	max. 400 g

Please note: The above dimensions are for reference only.
Some products, although within the above dimensions, may be difficult to vend due to its shape.
Please vend test products before filling machine.

G-DRINK TOUCH OUTDOOR

Outdoor refreshment at your fingertips

When premium usability meets smart outdoor vending: meet G-Drink Touch Outdoor, the new concept developed by SandenVendo to keep up with the new generation of vending users and their purchasing habits.

The new G-Drink Touch Outdoor represents a smart way to boost, ease, and fasten your vending sales thanks to an intuitive, user-friendly touch screen designed to indulge customers in multi-purchasing operations while showcasing branded offers and nutrition facts. Equipped with premium anti-vandal and IP34 anti-rain features for outdoor usage, serving cold drinks has never been easier.

Connect up to **4**
Slave Machines

STANDARD COLOUR **BLACK** ●



G-Drink DM 9 OD
Vertical Outdoor



**G-DRINK 9
OUTDOOR
DM9 OD**

**G-DRINK 6
OUTDOOR
DM6 OD**

DIMENSIONS H x W x D	1875* x 1260 x 1010 mm	1875* x 990 x 1010 mm
WEIGHT (NET - Standard machine without options)	410 kg	350 kg
NO. OF SELECTIONS PER SHELF	9	6
NO. OF SHELVES	Standard 5 / Max. 7	Standard 5 / Max. 7
NO. OF SELECTIONS	Standard 45 / Max. 63	Standard 30 / Max. 42
MAX. CAPACITY (0,33 l CANS)	504	336
MAX. CAPACITY (0,50 l PET BOTTLES)	360	240
PROTOCOL	Executive / MDB	Executive / MDB
COOLING SYSTEM CONTROL	Electronic	Electronic
COOLING UNIT	HCD	HCD
INTERNAL TEMPERATURE RANGE	+2 °C up to +10 °C	+2 °C up to +10 °C
AMBIENT TEMPERATURE RANGE	-15 °C up to +38 °C	-15 °C up to +38 °C
MAX. POWER CONSUMPTION	490 W	490 W
POWER SUPPLY	230/240 V - 50/60 Hz	230/240 V - 50/60 Hz
ENERGY CLASS		
ENERGY CONSUMPTION (kWh/annum)	1700	1290

*With adjustable leveling screw.

G-DRINK OUTDOOR

Outdoor refreshment

The Outdoor, IP34 certified waterproof version of SandenVendo's popular G-Drink model combines all the utmost innovations of a premium automatic vending machine with the newly-developed features required for outdoor usage including an anti-condensation heated glass, a roof and an anti-vandal front door for further protection.

Thanks to its thermal-magnetic circuit breaker and its anti-freezing function with temperature control specially designed for outdoor application, G-Drink Outdoor can also operate also below-zero temperature conditions while its LED illumination system serves as an impulse sales ally during shop-closing hours.



**Rainproof
IP34**



Roof



Reliable



**Heated
Glass**



**Ergonomic
Design**

**PET BOTTLES, GLASS BOTTLES, CANS
VENDIBLE PRODUCT SIZE**

Diameter	min. 43.5 mm	max. 73 mm
Height	min. 88 mm	max. 285 mm
Weight	min. 185 g	max. 653 g (980 g x6F)

**CARTON PACKS (BRICK)
VENDIBLE PRODUCT SIZE**

Width	min. 52 mm	max. 67 mm
Depth	min. 40 mm	max. 47 mm
Height	min. 85 mm	max. 134 mm
Weight	min. 213 g	max. 400 g

Please note: The above dimensions are for reference only.
Some products, although within the above dimensions, may be difficult to vend due to its shape.
Please vend test products before filling machine.

Connect **1**
Slave Machine

STANDARD COLOUR **BLACK** ●

Connectable Machines

**DESIGNED TO INCREASE
YOUR VENDING CAPACITY**



**Install a G-Snack Slave next to a G-Caffè...
and breakfast is served!**


SandenVendo's Connectable models offer a smart solution to increase sales volume.

Each master unit equipped with a touchscreen selection panel (e.g., G-Caffè UNI-Q, Brain MMV, G-Drink, G-Snack or G-Frozen) can connect up to four machines, or just one slave machine if equipped with a keypad.

The Outdoor versions are IP34-certified against rain and feature anti-vandal protection: a truly versatile ally for your business!



SLAVE & CONNECTABLE MACHINES
INDOOR PRODUCT RANGE

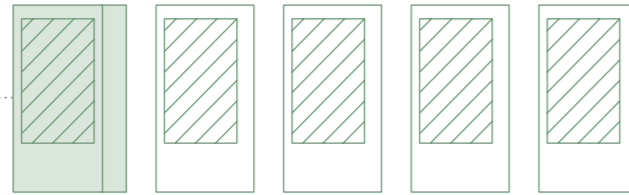

Linux System
**Link up to 4 slave
or connectable machines**


Models with a touchscreen (Linux operating system) can act as the main unit, connecting to up to four slave or connectable machines.



G-Snack
Design Touch Line



G-Drink
Design Touch Line



G-Snack
Evolution



Brain
MMV



Matrix
Locker



G-Frozen



G-Caffè
UNI-Q Touch



G-Caffè
UNI-Q



G-Snack Touch
Outdoor Line



G-Drink Touch
Outdoor Line



G-SNACK DESIGN
TEN (X) SLAVE
K5X



G-SNACK
TEN (X) SLAVE
K5X-B



G-DRINK DESIGN 9
SLAVE
D59



G-DRINK 9
SLAVE
D59-B



G-SNACK DESIGN
EIGHT (VIII) SLAVE
K58



G-SNACK
EIGHT (VIII) SLAVE
K58-B



G-DRINK DESIGN 6
SLAVE
D56



G-DRINK 6
SLAVE
D56-B




G-SNACK DESIGN
SIX (VI) SLAVE
K56



G-SNACK
SIX (VI) SLAVE
K56-B



G-FROZEN
SLAVE
KF8

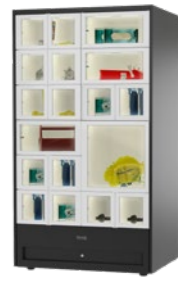

MATRIX LOCKER
SLAVE
S-LCK



SLAVE MACHINES
OUTDOOR PRODUCT
RANGE




G-SNACK OUTDOOR
TEN (X) SLAVE
K5X OD



G-SNACK OUTDOOR
EIGHT (VIII) SLAVE
K58 OD



G-SNACK OUTDOOR
SIX (VI) SLAVE
K56 OD



SVE-01 System
Connect 1 slave machine

Machines operated with the SVE-01 system can function as the master unit and connect to one slave machine.



G-Snack
Design Line



G-Snack
Back Loader



G-Snack
Standard Line



G-Snack
Outdoor Line



G-Drink
Design Line



G-Drink
Standard Line



G-Drink
Outdoor Line



SLAVE MACHINES
INDOOR PRODUCT RANGE



G-SNACK DESIGN
TEN (X) SLAVE
SSX



G-SNACK
TEN (X) SLAVE
SSX-B



BACK LOADER
SLAVE
SSB-H2



G-SNACK DESIGN
EIGHT (VIII) SLAVE
SS8



G-SNACK
EIGHT (VIII) SLAVE
SS8-B



G-SNACK
EVOLUTION SLAVE 8
EVS



G-SNACK DESIGN
SIX (VI) SLAVE
SS6



G-SNACK
SIX (VI) SLAVE
SS6-B



SLAVE MACHINES
OUTDOOR PRODUCT RANGE



G-SNACK OUTDOOR
TEN (X) SLAVE
SSX OD



G-SNACK OUTDOOR
EIGHT (VIII) SLAVE
SS8 OD



G-SNACK OUTDOOR
SIX (VI) SLAVE
SS6 OD

Option List - Vending Machines

Snacks, Drinks & Merchandising

Option / Model	Design Touch			Design Line			Standard Line			Budget	Combi	
	STX	ST8	ST6	SDX	SC8	SC6	S2L	SMX	SM8	SM6	BS8	BB8
Speedy Lift	✓	✓	✓	✓	✓	✓	N/A	✓	✓	✓	N/A	N/A
E-Labeling	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	N/A	N/A
Rotary System	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Belt System	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Kit Sandwich	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Kit Baguette	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Motorized Lock Delivery Eyelet	✓	✓	✓	✓	✓	✓	N/A	✓	✓	✓	N/A	N/A
Optical Sensor for Product Detection	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	✓	Standard
Special Coded Lock (Rielda)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Lock Protection	✓	✓	✓	✓	✓	✓	N/A	✓	✓	✓	N/A	N/A
Safety Slide Coin Insert	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Security Cash Box System	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	N/A
Wall/Floor Fixing Kit	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Payment System	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Various Fitting Kits	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Customization	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Customized Cabinet and Door colour	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

Option / Model	Evolution	Back Loader	Frozen		Slave		Evolution Slave	Back Loader Slave	
	AMX	SBX	FF8	FF8-S	KSX/SSX	KS8/SS8	KS6/SS6	EVS	SSB
Speedy Lift	Standard	N/A	N/A	N/A	✓	✓	✓	Standard	N/A
E-Labeling	✓	N/A	N/A	N/A	✓	✓	✓	✓	N/A
Rotary System	✓	✓	N/A	N/A	✓	✓	✓	✓	✓
Belt System	✓	✓	N/A	N/A	✓	✓	✓	✓	✓
Kit Sandwich	✓	N/A	N/A	N/A	✓	✓	✓	✓	N/A
Kit Baguette	✓	N/A	N/A	N/A	✓	✓	✓	✓	N/A
Motorized Lock Delivery Eyelet	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Optical Sensor for Product Detection	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard
Special Coded Lock (Rielda)	✓	✓	✓	✓	✓	✓	✓	✓	✓
Lock Protection	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Safety Slide Coin Insert	✓	✓	✓	✓	N/A	N/A	N/A	N/A	N/A
Security Cash Box System	✓	✓	✓	✓	N/A	N/A	N/A	N/A	N/A
Wall/Floor Fixing Kit	✓	Only floor	✓	✓	✓	✓	✓	✓	Only floor
Payment System	✓	✓	✓	✓	✓	✓	✓	✓	N/A
Various Fitting Kits	✓	✓	✓	✓	✓	✓	✓	✓	✓
Customization	✓	✓	✓	✓	✓	✓	✓	✓	✓
Customized Cabinet and Door colour	✓	✓	✓	✓	✓	✓	✓	✓	✓

Option List - Vending Machines

Cold Drinks



Option / Model	Design Touch		Design Line		Standard Line		Slave		Narrow Stack XS-C36 S-C47 M-C48 L-C4X	Super Stack C26	Flex Stack CFX
	DT9	DT6	DV9	DC6	DM9	DM6	DS9	DS6			
Special Coded Lock (Rielda)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Lock Protection	✓	✓	✓	✓	✓	✓	N/A	N/A	N/A	N/A	N/A
Safety Slide Coin Insert	✓	✓	✓	✓	✓	✓	N/A	N/A	✓	✓	✓
Security Cash Box System	✓	✓	✓	✓	✓	✓	N/A	N/A	✓	✓	✓
Wall/Floor Fixing Kit	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Payment System	✓	✓	✓	✓	✓	✓	N/A	N/A	✓	✓	✓
Various Fitting Kits	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Customization	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Customized Cabinet and Door colour	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Outdoor Kit IP34	-	-	-	-	-	-	-	-	✓	✓	✓

Option List - Outdoor Vending Machines

Snacks, Drinks & Merchandising



Option / Model	Snack OD Touch			Snack OD Standard			Drink OD Touch		Drink OD Standard		Snack OD Slave		
	STX OD	ST8 OD	ST6 OD	SMX OD	SM8 OD	SM6 OD	DT9 OD	DT6 OD	DM9 OD	DM6 OD	KSX/SSX OD	KS8/SS8 OD	KS6/SS6 OD
Speedy Lift	✓	✓	✓	✓	✓	✓	-	-	-	-	✓	✓	✓
E-Labeling	✓	✓	✓	✓	✓	✓	-	-	-	-	✓	✓	✓
Rotary System	✓	✓	✓	✓	✓	✓	-	-	-	-	✓	✓	✓
Belt System	✓	✓	✓	✓	✓	✓	-	-	-	-	✓	✓	✓
Kit Sandwich	✓	✓	✓	✓	✓	✓	-	-	-	-	✓	✓	✓
Kit Baguette	✓	✓	✓	✓	✓	✓	-	-	-	-	✓	✓	✓
Motorized Lock Delivery Eyelet	✓	✓	✓	✓	✓	✓	-	-	-	-	N/A	N/A	N/A
Optical Sensor for Product Detection	Standard	Standard	Standard	Standard	Standard	Standard	-	-	-	-	Standard	Standard	Standard
Special Coded Lock (Rielda)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Lock Protection	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	N/A	N/A	N/A
Safety Slide Coin Insert	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	N/A	N/A	N/A
Security Cash Box System	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	N/A	N/A	N/A
Wall/Floor Fixing Kit	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Payment System	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	N/A	N/A	N/A
Various Fitting Kits	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Customization	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Customized Cabinet and Door colour	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

Table Tops

COMPACT SOLUTIONS FOR COFFEE, HOT DRINKS,
MERCHANDISE, AND TEMPERATURE-SENSITIVE
PRODUCTS.



Performance & Design

Designed for pub counters, co-working spaces, meeting rooms, or cultural centers, our tabletop range combines advanced vending technology with premium espresso brewing. Their exceptional versatility allows them to dispense a variety of products based on your specific needs.

Take a Break

Are you a perfectionist or a coffee lover, always searching for more than the usual office coffee?

Discover Unoffice and CaffèUno by SandenVendo, tabletop hot beverage solutions designed to captivate with their sophisticated style and warm your heart with every sip of freshly ground espresso, served at your ideal temperature through the 10" touch-screen panel.

When technology meets taste, satisfaction is guaranteed.



COFFEE SERVERS PRODUCT RANGE



CaffèUno Tabletop



Unoffice Tabletop






Caffèuno with hopper
Semiautomatic Espresso
with touch screen.
Ideal for breakfast buffet.



	CAFFÈUNO "PRO" ESPRESSO w/ hopper semiautomatic TSC	CAFFÈUNO ESPRESSO semiautomatic TSE	CAFFÈUNO INSTANT semiautomatic TSH
DIMENSIONS H x W x D	770 x 420 x 530 mm	660 x 420 x 530 mm	660 x 420 x 530 mm
WEIGHT (NET - Standard machine without options)	35 Kg	35 Kg	35 Kg
COFFEE BEANS CONTAINER	2,4 kg (hopper)	1,2 kg	///
POWDER CANISTER	2 Large 1 Small	2 Large 1 Small	2 Large 2 Medium 1 Small
GRINDER	Professional conical burr	Professional conical burr	///
INTERFACE	TOUCH	10" Touch screen	10" Touch screen
	DIRECT SELECTION	5" Display with direct push button	5" Display with direct push button
WATER FITTING CONNECTION	G 3/4" 2 - 8 Bar (0.2 Mpa - 0.8 Mpa)	G 3/4" 2 - 8 Bar (0.2 Mpa - 0.8 Mpa)	G 3/4" 2 - 8 Bar (0.2 Mpa - 0.8 Mpa)
THERMO FUSE	16A	16A	16A
PAYMENT SYSTEM PROTOCOL [OPTIONAL]	MDB / Executive	MDB / Executive	MDB / Executive
POWER SUPPLY	220/240 V - 50/60 Hz	220/240 V - 50/60 Hz	220/240 V - 50/60 Hz
ENERGY CONSUMPTION*	134 Wh/L	134 Wh/L	134 Wh/L

*Energy consumption in Wh per liter of Espresso dispensed



Base Cabinet

BASE CABINET*


- Black P/N T1841/3
- White P/N T1841/4

CUP UNIT MODULE

- Black PN T1841-200
- White PN T1841-300

	BASE CABINET*	CUP UNIT MODULE
DIMENSIONS H x W x D	820 x 420 x 515 mm	150 x 415 x 590 mm
WEIGHT	21,4 Kg	13 Kg

*BASE CABINET requires KIT 145222 Water Tank 20 little KIT, Clip, Bucket and tubes and cables



Cup Unit Module

CAFFÈUNO TABLETOP

Enhance your downtime

Caffèuno is the compact tabletop coffee server designed to fit in any location without compromising on coffee quality; available in black or white monochrome, Caffèuno is the modern espresso coffee vending server equipped with a large and user-friendly touch display or direct selection panel.

One cup, one temperature: ideal for breakfast buffets and meeting rooms, the top-notch heating system installed on Caffèuno allows for customizing each cup's temperature setting, while the "PRO" model with visible coffee beans hopper will give a twist to your usual coffee breaks.

PRODUCT	CANISTER SIZE		
	SMALL	MEDIUM	LARGE
POWDER MILK	0.3 Kg	0.7 Kg	1.0 Kg
CHOCOLATE	0.8 Kg	1.5 Kg	2.2 Kg
LEMON TEA	1.0 Kg	2.0 Kg	3.0 Kg
GINSENG TEA	0.5 Kg	1.0 Kg	1.5 Kg
INSTANT COFFEE	0.3 Kg	0.6 Kg	0.9 Kg
BARLEY COFFEE	0.2 Kg	0.4 Kg	0.6 Kg



OPTION LIST

- Touch screen 10"
- Large Espresso brewer
- Cup sensor
- Water tank kit 20 lt.
- Water softener (filter) external fitting
- Special coded lock (Rielda)
- Payment system
- Base cabinet
- Payment Tower Module
- Customized panel
- Customized cabinet colour



MAINTENANCE

- SW update through USB
- Easy regular maintenance via 4 function keys
- 24V DC devices (except heater, grinder & pump)
- Color coded materials by maintenance period
- Maintenance message on display

STANDARD COLOURS

- Black ● | White ○



UNOFFICE
ESPRESSO semiautomatic
UNO

DIMENSIONS H x W x D (mm)	590 x 300 x 460
WEIGHT (NET - Standard machine without options)	25 Kg
COFFEE BEANS CANISTER (SINGLE / DOUBLE)	800 g / 2x 350 g
GRINDER	Professional Conical Burr
INTERFACE TOUCH	10" Touch Screen
WATER FITTING CONNECTION	G 3/4" 0.2-8 Bar (0.2 Mpa – 0.8 Mpa)
SELF-WATER TANK	2.5 L
THERMO FUSE	10A
POWER SUPPLY	220/240 V - 50/60 Hz
MAX. POWER CONSUMPTION	2300 W
ENERGY CONSUMPTION*	134 Wh/L

*Energy consumption in Wh per liter of Espresso dispensed



■ UNOFFICE TABLETOP

Hey, this coffee is grooving!

Unoffice is what happens when you combine superior brewing performances with an exclusive vintage design.

Customize your work break with Unoffice, the vintage-style tabletop coffee machine designed to please your never-ending search for high-end perfection.

Designed to solely process coffee from its beans, you can fill Unoffice's double beans canister with coffee beans and let it grind.

Available in four vintage colors to add a touch of Italian flair to your venue, Unoffice comes with two water supply options: an internal self-tank system or a direct water connection.

STANDARD COLOURS

○ PEARL WHITE

● AQUA GREEN

● VENDO RED

● PASTEL BLUE



MAINTENANCE


SW update through USB
24V DC devices (except heater,
grinder & pump)
Maintenance message on display

Compact Vending Solutions

Your favorite G-Snack vending machine is now in a sleek tabletop version!

Whether it's drinks, snacks, temperature-sensitive items, or Extra Vending products, SnackUNO, UnoCool, and UnoCool+ can do it all!

Customizable with your choice of keypad or touchscreen interface and digital payment methods, these tabletop vending machines are the smart, space-saving solution for modern vending businesses.

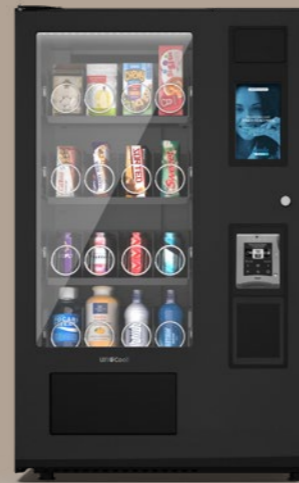

SNACKS, DRINKS & MERCHANDISING PRODUCT RANGE



SnackUno Tabletop



UnoCool Tabletop



UnoCool+ Tabletop





SnackUNO
(Payment system as option)

SNACKUNO TABLETOP

Enhance your downtime

SnackUNO is SandenVendo's most compact, reliable and flexible countertop vending machine; available in black or white monochrome, this compact automatic vending machine is backed with a spacious product storage capability.

Equipped with complimentary digital purchasing methods, SnackUNO's versatility makes it an ideal solution for meeting rooms or hotel halls: snacks, hotel amenities, tobacco or even alcoholic products can be displayed inside SnackUNO thanks Age Control feature available as an option for installation.

SNACKUNO TABLETOP SSP

DIMENSIONS H x W x D	700 x 525 x 475 mm
WEIGHT (NET/GROSS - Standard machine without options)	50 kg / 55 kg
NO. OF SELECTIONS PER SHELF	4
NO. OF SHELVES	Standard 3 / Max. 4
NO. OF SELECTIONS	Max. 16
DISPLAY	LCD
PROTOCOL	Executive / MDB
MAX. POWER CONSUMPTION	50 W
POWER SUPPLY	220 V / 50 Hz



OPTION LIST

- Optical sensor for product detection
- Special coded lock (Rielda)
- Payment system
- Payment tower module
- Customization
- Customized cabinet colour

STANDARD COLOURS

Black ● | White ○





UnoCool
(Payment system as option)

UNOCOOL TABLETOP SUC	
DIMENSIONS H x W x D	800 x 590 x 620 mm
WEIGHT (NET/GROSS - Standard machine without options)	70 Kg / 75 Kg
NO. OF SELECTIONS PER SHELF	4
NO. OF SHELVES	Standard 3 / Max. 4
NO. OF SELECTIONS	Max. 16
DISPLAY	TOUCH 7"
PROTOCOL	Executive / MDB
COOLING UNIT	Thermoelectric
COOLING SYSTEM CONTROL	Delta T=12 °C vs. Ambient T
INTERNAL TEMPERATURE RANGE	10 °C
MAX. POWER CONSUMPTION	180 W
POWER SUPPLY	220 V / 50 Hz
ENERGY CONSUMPTION (kWh/annum)	841



UNOCOOL TABLETOP

Tabletop vending with thermoelectric cooling system

UnoCool is SandenVendo's tabletop snack dispenser designed to meet the demands of a clientele with limited space availability, who aspire to deliver temperature-sensitive products.

Compact but spacious, UnoCool is perfect for venues with limited space, like pubs, offices, sports facilities, and hotel receptions.

Load all your favorite drinks and snacks in this new eco-friendly device: UnoCool, our first vending solution powered by a Thermoelectric Cooler (TEC), chills products to a refreshing temperature of 10 °C/50°F.



STANDARD COLOURS

Black ● | White ○



UnoCool+
(Payment system as option)

	UNOCOOL+ TABLETOP SUP
DIMENSIONS H x W x D	980 x 590 x 620 mm
WEIGHT (NET/GROSS - Standard machine without options)	80 Kg / 85 Kg
NO. OF SELECTIONS PER SHELF	4
NO. OF SHELVES	Standard 3 / Max. 4
NO. OF SELECTIONS	Max. 16
DISPLAY	TOUCH 7"
PROTOCOL	Executive / MDB
COOLING UNIT	Thermoelectric
COOLING SYSTEM CONTROL	Delta T=12 °C vs. Ambient T
INTERNAL TEMPERATURE RANGE	10 °C
MAX. POWER CONSUMPTION	180 W
POWER SUPPLY	220 V / 50 Hz
ENERGY CONSUMPTION (kWh/annum)	1130



■ UNOCOOL+ TABLETOP

Compact vending, but make it cool!

SandenVendo's compact vending machines range expands its offer with UnoCool+(plus), the new, eco-friendly, and refrigerated tabletop solution created to allow more facilities to benefit from the service of a vending machine.

The tallest machine among the tabletop spiral models, yet always space-saving in a small footprint, UnoCool+ will accommodate products up to 230 mm in height in a 3-shelf configuration and 170 mm in a 4-shelf one.

Install it in pubs, office spaces, meeting rooms, sports facilities, and hotel receptions and load it with heat-sensitive products such as chocolate, protein drinks, or even cosmetics.



STANDARD COLOURS

Black ● | White ○

All-in-One Compact Solutions

Combine Caffè UNO, our premium coffee and hot beverage machine, with a UNOCool PLUS Slave and UNOCool Slave, our refrigerated dispenser for cold drinks and snacks: one unit, two essentials!



Discover the perfect harmony of hot and cold vending in a single, compact solution.



Available in *black* or *white*, this sleek design solution seamlessly fits into any environment, whether *countertop* or *freestanding*, adapting effortlessly to your space and needs.

Ideal for offices and co-working spaces, hotels lounges, boutiques or small Businesses and Retail Spaces, with a compact footprint and dual functionality, this vending solution is designed to maximize convenience while optimizing space.



Cup Unit Module

© 2025 SandenVendo GmbH
All rights reserved.

Technical data, images and information provided on this document is intended for informational purposes only; All specifications are subject to change without notice.

Rev. 00 - 2025

Germany
SandenVendo GmbH
PH +49 (0) 211 74039 0
info@sandenvendo.de

Benelux
SandenVendo Belgium Branch
of SandenVendo GmbH
PH +32 2 268 2595
info@sandenvendo.be

Italy
SandenVendo GmbH
Italian Branch
PH +39 0142 234 220
marketing@sandenvendo.it

Spain
SandenVendo Spain
Sucursal en España
PH +34 93 474 1555
info@sandenvendo.es

France
SandenVendo France Branch
of SandenVendo GmbH
PH +33 1 70 38 24 88
info@sandenvendo.fr



www.sandenvendo.com