



XS-C36

## Eco Bottle & Can

The best choice of cold drinks


The SandenVendo's fame stands for the reliable mechanism and the top quality of cooling unit for the cold drink models since 30's. The recent trend is coming back to the robust and simple yet functional column vendors, where SandenVendo is referred as a market leader.

The SandenVendo's traditional Bottle&Can went through a restyling and now presented in an elegant Design line, by upgrading with modern features and user-friendly interface.

In addition, always considering environmental sustainability, this line has been developed with HC (R290) Hydro Carbon version, pursuing the commitment to natural refrigerants.

## B&C DESIGN C36 (XS)

TECHNICAL SPECIFICATIONS	XS-C36
DIMENSIONS H x W x D (mm)	1830 x 650 x 800
WEIGHT (NET - Standard machine without options)	280 Kg
NO. OF SELECTIONS / COLUMNS	6 / 6
MAX. PRODUCT LENGTH (mm)	325
MAX. PRODUCT DIAMETER (mm)	72
MAX. CAPACITIES CANS 0.33 l	306
MAX. CAPACITIES PET BOTTLES 0.50 l	102
PROTOCOL	Executive / MDB
COOLING SYSTEM CONTROL	Electronic
INTERNAL TEMPERATURE RANGE	+1°C up to +25°C
MAX. POWER CONSUMPTION	650 W
POWER SUPPLY	230 V / 50 Hz

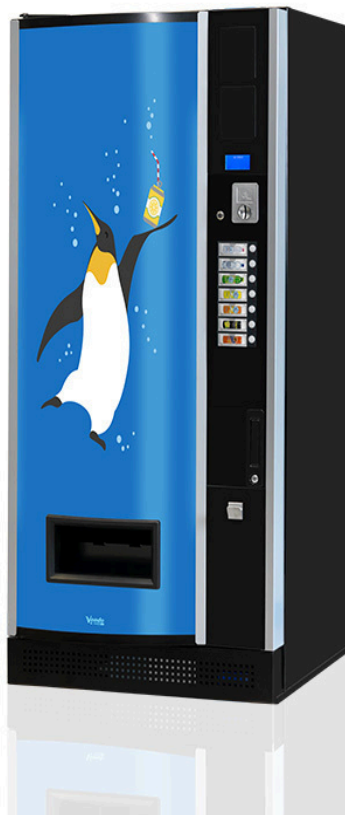

S-C47

## Eco Bottle & Can

The best choice of cold drinks

The SandenVendo's fame stands for the reliable mechanism and the top quality of cooling unit for the cold drink models since 30's. The recent trend is coming back to the robust and simple yet functional column vendors, where SandenVendo is referred as a market leader.

The SandenVendo's traditional Bottle&Can went through a restyling and now presented in an elegant Design line, by upgrading with modern features and user-friendly interface.

In addition, always considering environmental sustainability, this line has been developed with HC (R290) Hydro Carbon version, pursuing the commitment to natural refrigerants.

## B&C DESIGN C47 (S)

TECHNICAL SPECIFICATIONS	S-C47
DIMENSIONS H x W x D (mm)	1830 x 750 x 955
WEIGHT (NET - Standard machine without options)	300 Kg
NO. OF SELECTIONS / COLUMNS	7 / 7
MAX. PRODUCT LENGTH (mm)	325
MAX. PRODUCT DIAMETER (mm)	72
MAX. CAPACITIES CANS 0.33 l	476
MAX. CAPACITIES PET BOTTLES 0.50 l	238
PROTOCOL	Executive / MDB
COOLING SYSTEM CONTROL	Electronic
INTERNAL TEMPERATURE RANGE	+1°C up to +25°C
MAX. POWER CONSUMPTION	700 W
POWER SUPPLY	230 V / 50 Hz



M-C48

## Eco Bottle & Can

The best choice of cold drinks

The SandenVendo's fame stands for the reliable mechanism and the top quality of cooling unit for the cold drink models since 30's. The recent trend is coming back to the robust and simple yet functional column vendors, where SandenVendo is referred as a market leader.

The SandenVendo's traditional Bottle&Can went through a restyling and now presented in an elegant Design line, by upgrading with modern features and user-friendly interface.

In addition, always considering environmental sustainability, this line has been developed with HC (R290) Hydro Carbon version, pursuing the commitment to natural refrigerants.

# B&C DESIGN C48 (M)

TECHNICAL SPECIFICATIONS	M-C48
DIMENSIONS H x W x D (mm)	1830 x 850 x 955
WEIGHT (NET - Standard machine without options)	340 Kg
NO. OF SELECTIONS / COLUMNS	8 / 8
MAX. PRODUCT LENGTH (mm)	325
MAX. PRODUCT DIAMETER (mm)	72
MAX. CAPACITIES CANS 0.33 l	544
MAX. CAPACITIES PET BOTTLES 0.50 l	272
PROTOCOL	Executive / MDB
COOLING SYSTEM CONTROL	Electronic
INTERNAL TEMPERATURE RANGE	+1°C up to +25°C
MAX. POWER CONSUMPTION	700 W
POWER SUPPLY	230 V / 50 Hz



L-C4X

## Eco Bottle & Can

The best choice of cold drinks

The SandenVendo's fame stands for the reliable mechanism and the top quality of cooling unit for the cold drink models since 30's. The recent trend is coming back to the robust and simple yet functional column vendors, where SandenVendo is referred as a market leader.

The SandenVendo's traditional Bottle&Can went through a restyling and now presented in an elegant Design line, by upgrading with modern features and user-friendly interface.

In addition, always considering environmental sustainability, this line has been developed with HC (R290) Hydro Carbon version, pursuing the commitment to natural refrigerants.

## B&C DESIGN C4X (L)

TECHNICAL SPECIFICATIONS	L-C4X
DIMENSIONS H x W x D (mm)	1830 x 1015 x 955
WEIGHT (NET - Standard machine without options)	375 Kg
NO. OF SELECTIONS / COLUMNS	10 / 10
MAX. PRODUCT LENGTH (mm)	325
MAX. PRODUCT DIAMETER (mm)	72
MAX. CAPACITIES CANS 0.33 l	680
MAX. CAPACITIES PET BOTTLES 0.50 l	340
PROTOCOL	Executive / MDB
COOLING SYSTEM CONTROL	Electronic
INTERNAL TEMPERATURE RANGE	+1°C up to +25°C
MAX. POWER CONSUMPTION	700 W
POWER SUPPLY	230 V / 50 Hz